
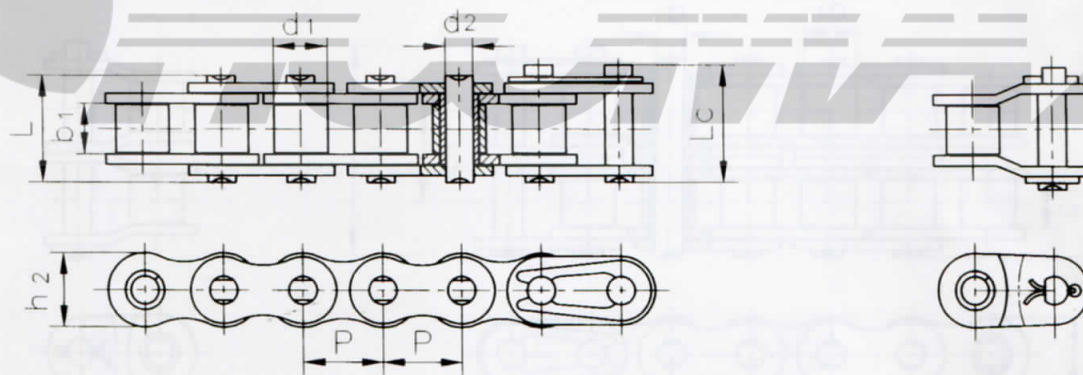


單排滾子鏈 套筒鏈
Single strand roller chains
& bushing chains

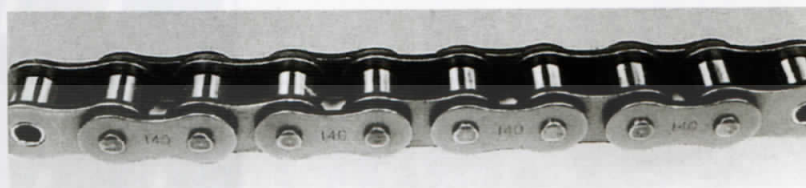

DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	Q min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*04C-1	*25	6.35	3.30	3.18	2.31	7.9	8.4	6.0	3.5	4.4	0.15
*06C-1	*35	9.525	5.08	4.77	3.58	12.4	13.17	9.0	7.9	9.8	0.33
085-1	41	12.7	7.77	6.25	3.58	13.75	15.0	9.91	6.67	11.8	0.41
08A-1	40	12.7	7.95	7.85	3.96	16.6	17.8	12.0	14.1	17.0	0.62
10A-1	50	15.875	10.16	9.40	5.08	20.7	22.2	15.09	22.2	26.4	1.02
12A-1	60	19.05	11.91	12.57	5.94	25.9	27.7	18.0	31.8	38.8	1.50
16A-1	80	25.4	15.88	15.75	7.92	32.7	35.0	24.0	56.7	64.9	2.60
20A-1	100	31.75	19.05	18.90	9.53	40.4	44.7	30.0	88.5	101.8	3.91
24A-1	120	38.1	22.23	25.22	11 10	50.3	54.3	35.7	127.0	147.0	5.62
28A-1	140	44.45	25.40	25.22	12.70	54.4	59.0	41.0	172.4	197.7	7.50
32A-1	160	50.8	28.58	31.55	14.27	64.8	69.6	47.8	226.8	260.2	10.10
36A-1	180	57 15	35.71	35.48	17.46	72.8	78.6	53.6	280.2	327.8	13.45
40A-1	200	63.5	39.68	37.85	19.85	80.3	87.2	60.0	353.8	405.0	16.15
48A-1	240	76.2	47.63	47.35	23.81	95.5	103.0	72.39	510.3	585.4	23.20



*套筒鏈: 表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.

A系列短節距精密滾子鏈

Short Pitch Transmission Precision Roller Chains (A Series)

雙排滾子鏈 套筒鏈
Double strand roller chains
& bushing chains

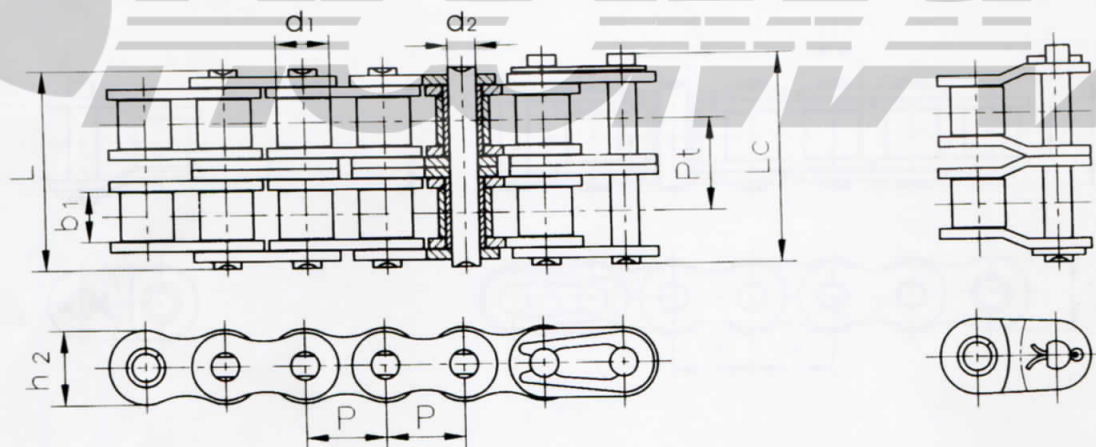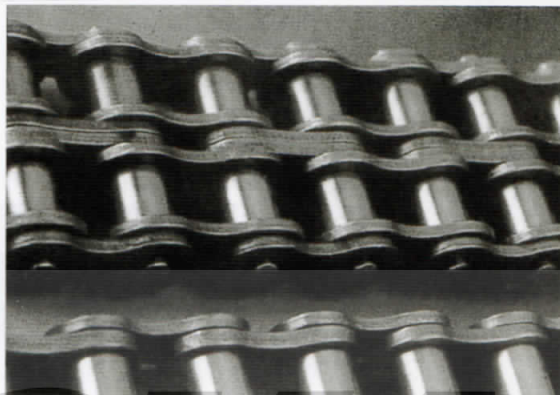

DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	P _t	Q min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*04C-2	*25-2	6.35	3.30	3.18	2.31	14.5	15.0	6.0	6.40	7.0	8.2	0.28
*06C-2	*35-2	9.525	5.08	4.77	3.58	22.5	23.3	9.0	10.13	15.8	19.1	0.63
08A-2	40-2	12.7	7.95	7.85	3.96	31.0	32.2	12.0	14.38	28.2	33.6	1.12
10A-2	50-2	15.875	10.16	9.40	5.08	38.9	40.4	15.09	18.11	44.4	55.4	2.00
12A-2	60-2	19.05	11.91	12.57	5.94	48.8	50.5	18.0	22.78	63.6	83.2	2.92
16A-2	80-2	25.4	15.88	15.75	7.92	62.7	64.3	24.0	29.29	113.4	140.0	5.15
20A-2	100-2	31.75	19.05	18.90	9.53	76.4	80.5	30.0	35.76	177.0	202.9	7.80
24A-2	120-2	38.1	22.23	25.22	11.10	95.8	99.7	35.7	45.44	254.0	291.4	11.70
28A-2	140-2	44.45	25.40	25.22	12.70	103.3	107.9	41.0	48.87	344.8	395.5	15.14
32A-2	160-2	50.8	28.58	31.55	14.27	123.3	128.1	47.8	58.55	453.6	520.4	20.14
36A-2	180-2	57.15	35.71	35.48	17.46	138.6	144.4	53.6	65.84	560.5	655.7	29.22
40A-2	200-2	63.5	39.68	37.85	19.85	151.9	158.8	60.0	71.55	707.6	748.6	32.24
48A-2	240-2	76.2	47.63	47.35	23.81	183.4	190.8	72.39	87.83	1020.6	1170.9	45.23



*套筒鏈: 表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.



三排滾子鏈 套筒鏈

Triple strand roller chains & bushing chains

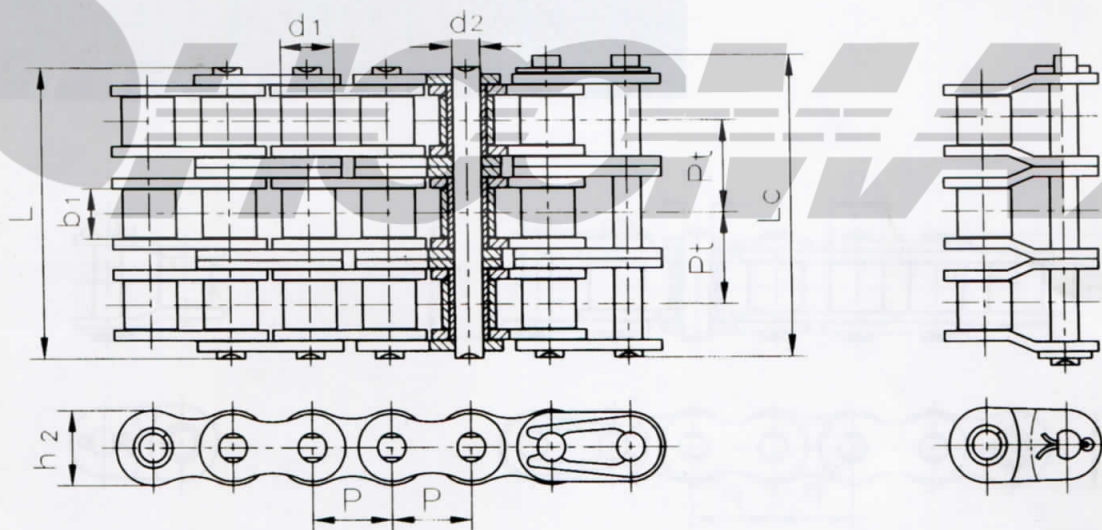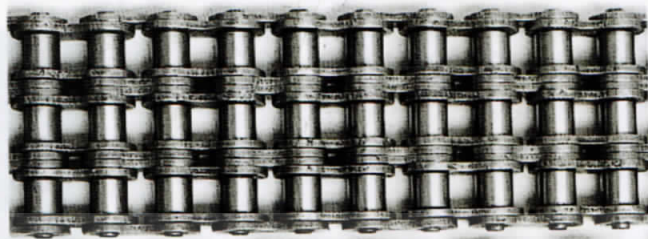

DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	P _t	Q _{min}	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*06C-3	*35-3	9.525	5.08	4.77	3.58	32.7	33.5	9.0	10.13	23.7	28.6	1.05
08A-3	40-3	12.7	7.95	7.85	3.96	45.4	46.6	12.0	14.38	42.3	50.0	1.90
10A-3	50-3	15.875	10.16	9.40	5.08	57.0	58.5	15.09	18.11	66.6	77.8	3.09
12A-3	60-3	19.05	11.91	12.57	5.94	71.5	73.3	18.0	22.78	95.4	111.1	4.54
16A-3	80-3	25.4	15.88	15.75	7.92	91.7	93.6	24.0	29.29	170.1	198.4	7.89
20A-3	100-3	31.75	19.05	18.90	9.53	112.2	116.3	30.0	35.76	265.5	309.6	11.77
24A-3	120-3	38.1	22.23	25.22	11.10	141.4	145.2	35.7	45.44	381.0	437.2	17.53
28A-3	140-3	44.45	25.40	25.22	12.70	152.2	156.8	41.0	48.87	517.2	593.3	22.20
32A-3	160-3	50.8	28.58	31.55	14.27	181.8	186.6	47.8	58.55	680.4	780.6	30.02
36A-3	180-3	57.15	35.71	35.48	17.46	204.4	210.2	53.6	65.84	840.7	983.6	38.22
40A-3	200-3	63.5	39.68	37.85	19.85	223.5	230.4	60.0	71.55	1061.4	1217.8	49.03
48A-3	240-3	76.2	47.63	47.35	23.81	271.3	278.6	72.39	87.83	1530.9	1756.5	71.60



*套筒鏈: 表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.



單排滾子鏈

Single strand roller chains

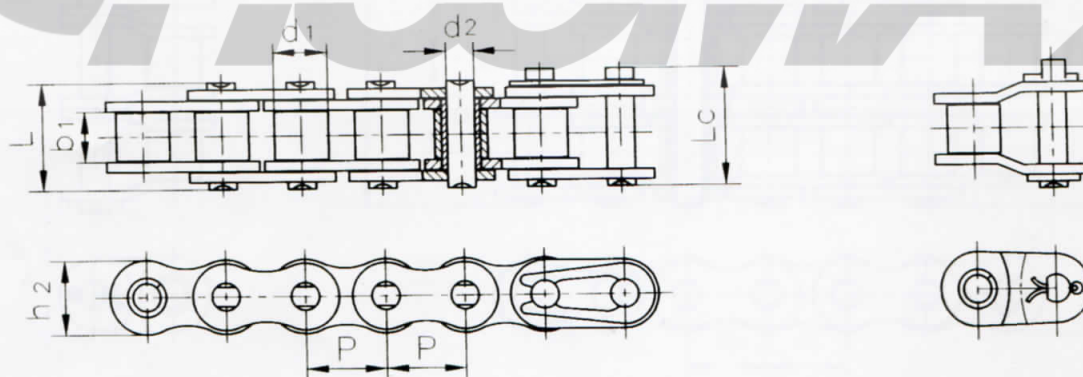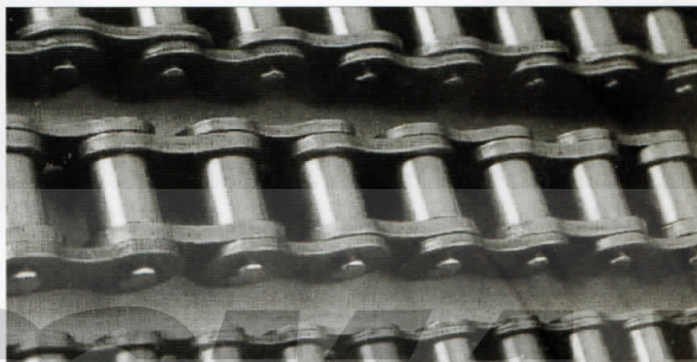

DIN ISO 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
04B-1	6.0	4.00	2.80	1.85	6.8	7.8	5.0	3.0	3.2	0.11
05B-1	8.0	5.00	3.00	2.31	8.2	8.9	7.1	5.0	5.8	0.20
*06B-1	9.525	6.35	5.72	3.28	13.15	14.1	8.2	9.0	10.0	0.41
08B-1	12.7	8.51	7.75	4.45	16.7	18.2	11.8	18.0	19.3	0.69
10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	22.4	26.5	0.93
12B-1	19.05	12.07	11.68	5.72	22.5	24.2	16.0	29.0	32.2	1.15
16B-1	25.4	15.88	17.02	8.28	36.1	37.4	21.0	60.0	70.5	2.71
20B-1	31.75	19.05	19.56	10.19	41.3	45.0	26.4	95.0	101.3	3.70
24B-1	38.1	25.40	25.40	14.63	53.4	57.8	33.2	160.0	174.0	7.10
28B-1	44.45	27.94	30.99	15.90	65.1	69.5	36.7	200.0	214.0	8.50
32B-1	50.8	29.21	30.99	17.81	66.0	71.0	42.0	250.0	267.5	10.25
40B-1	63.5	39.37	38.10	22.89	82.2	89.2	52.96	355.0	379.8	16.35
48B-1	76.2	48.26	45.72	29.24	99.1	107.0	63.8	560.0	599.2	25.00



*直鏈板

*Straight side plates



雙排滾子鏈

Double strand roller chains

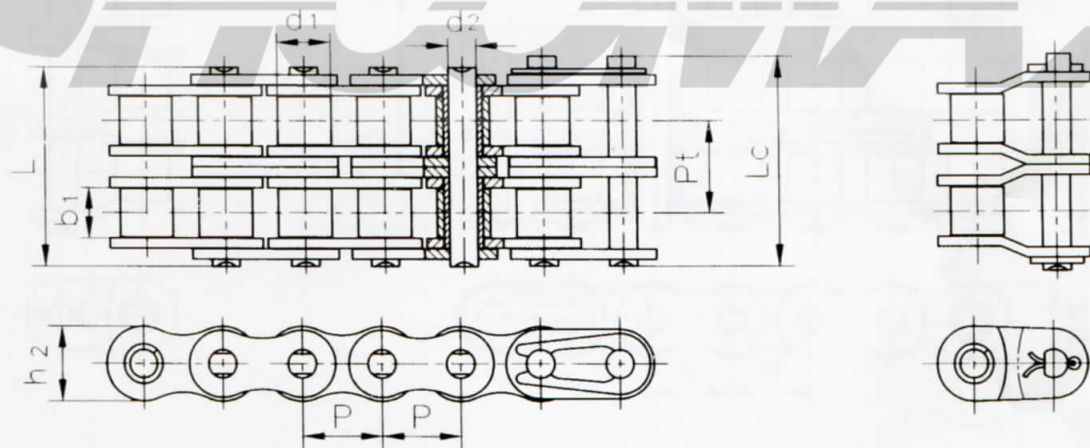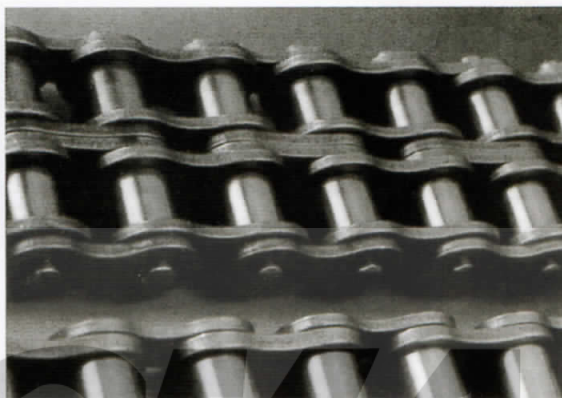



DIN ISO 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	P	d_1 max	b_1 min	d_2 max	L max	L_c max	h_2 max	P_t	Q min	Q_0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
05B-2	8.0	5.00	3.00	2.31	13.9	14.5	7.1	5.64	7.8	10.2	0.33
*06B-2	9.525	6.35	5.72	3.28	23.4	24.4	8.2	10.24	16.9	17.9	0.77
08B-2	12.7	8.51	7.75	4.45	31.2	32.2	11.8	13.92	32.0	37.4	1.34
10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	16.59	44.5	54.2	1.84
12B-2	19.05	12.07	11.68	5.72	42.0	43.6	16.0	19.46	57.8	65.7	2.31
16B-2	25.4	15.88	17.02	8.28	68.0	69.3	21.0	31.88	106.0	124.5	5.42
20B-2	31.75	19.05	19.56	10.19	77.8	81.5	26.4	36.45	170.0	210.0	7.20
24B-2	38.1	25.40	25.40	14.63	101.7	106.2	33.2	48.36	280.0	304.5	13.40
28B-2	44.45	27.94	30.99	15.90	124.6	129.1	36.7	59.56	360.0	385.2	16.60
32B-2	50.8	29.21	30.99	17.81	124.6	129.6	42.0	58.55	450.0	477.0	21.00
40B-2	63.5	39.37	38.10	22.89	154.5	161.5	52.96	72.29	630.0	667.8	32.00
48B-2	76.2	48.26	45.72	29.24	190.4	198.2	63.8	91.21	1000.0	1060.0	50.00

*直鏈板

*Straight side plates





三排滾子鏈
Triple strand roller chains

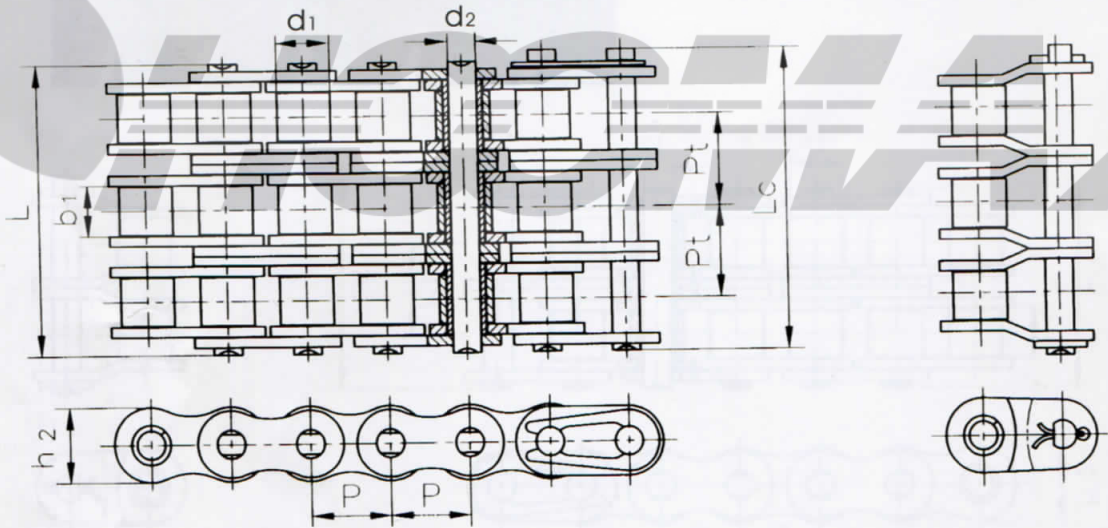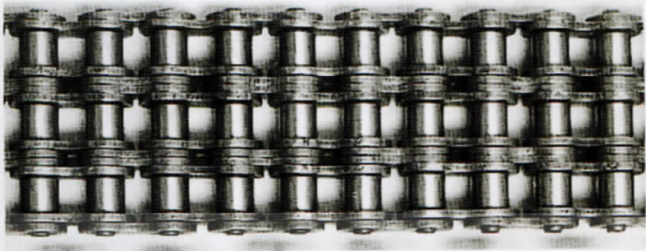

DIN ISO 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	P _t	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
05B-3	8.0	5.00	3.00	2.31	19.5	20.2	7.1	5.64	11.1	13.8	0.48
*06B-3	9.525	6.35	5.72	3.28	33.5	34.6	8.2	10.24	24.9	29.8	1.16
08B-3	12.7	8.51	7.75	4.45	45.1	46.1	11.8	13.92	47.5	50.2	2.03
10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	16.59	66.7	79.6	2.77
12B-3	19.05	12.07	11.68	5.72	61.5	63.1	16.0	19.46	86.7	101.8	3.46
16B-3	25.4	15.88	17.02	8.28	99.8	101.2	21.0	31.88	160.0	188.0	8.13
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.4	36.45	250.0	266.6	10.82
24B-3	38.1	25.40	25.40	14.63	150.1	154.6	33.2	48.36	425.0	462.2	20.10
28B-3	44.45	27.94	30.99	15.90	184.2	188.7	36.7	59.56	530.0	561.8	24.92
32B-3	50.8	29.21	30.99	17.81	183.2	188.2	42.0	58.55	670.0	710.2	31.56
40B-3	63.5	39.37	38.10	22.89	226.8	233.8	52.96	72.29	950.0	1007.0	48.10
48B-3	76.2	48.26	45.72	29.24	281.6	289.4	63.8	91.21	1500.0	1590.0	75.00

*直鏈板
*Straight side plates

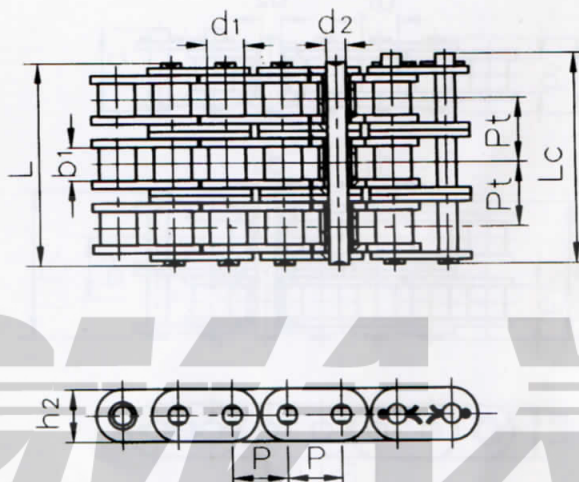
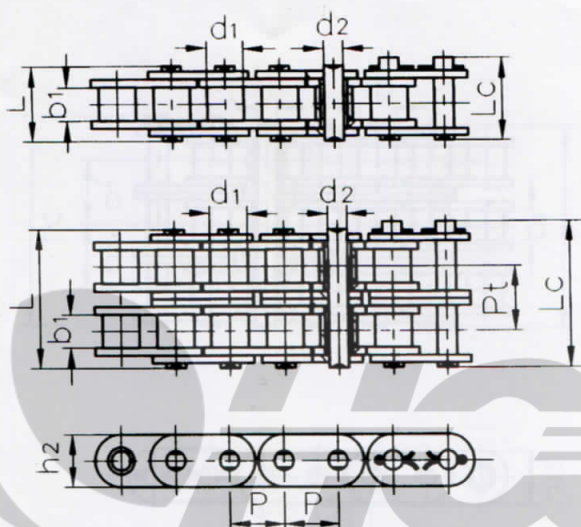


DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	P _t	Q _{min}	Q ₀	q ₀
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
C08A-1	C40	12.7	7.95	7.85	3.96	16.6	18.8	12.0		14.1	17.0	0.73
C10A-1	C50	15.875	10.16	9.40	5.08	20.7	23.3	15.09		22.2	26.4	1.23
C12A-1	C60	19.05	11.91	12.57	5.94	25.9	28.3	18.0		31.8	38.8	1.78
C16A-1	C80	25.4	15.88	15.75	7.92	32.7	36.5	24.0		56.7	64.9	3.09
C20A-1	C100	31.75	19.05	18.90	9.53	40.4	44.7	30.0		88.5	101.8	4.56
C24A-1	C120	38.1	22.23	25.22	11.10	50.3	54.3	35.7		127.0	147.0	6.86
C28A-1	C140	44.45	25.40	25.22	12.70	54.4	59.0	41.0		172.4	197.7	8.49
C32A-1	C160	50.8	28.58	31.55	14.27	64.8	69.6	47.8		226.8	260.2	11.50
C08A-2	C40-2	12.7	7.95	7.85	3.96	31.0	33.2	12.0	14.38	28.2	33.6	1.43
C10A-2	C50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	18.11	44.4	55.4	2.42
C12A-2	C60-2	19.05	11.91	12.57	5.94	48.8	51.1	18.0	22.78	63.6	83.2	3.53
C16A-2	C80-2	25.4	15.88	15.75	7.92	62.7	65.8	24.0	29.29	113.4	140.0	6.12
C20A-2	C100-2	31.75	19.05	18.90	9.53	76.4	80.5	30.0	35.76	177.0	202.9	9.08
C24A-2	C120-2	38.1	22.23	25.22	11.10	95.8	99.7	35.7	45.44	254.0	291.4	13.60
C28A-2	C140-2	44.45	25.40	25.22	12.70	103.3	107.9	41.0	48.87	344.8	395.5	16.86
C32A-2	C160-2	50.8	28.58	31.55	14.27	123.3	128.1	47.8	58.55	453.6	520.4	22.90
C08A-3	C40-3	12.7	7.95	7.85	3.96	45.4	47.6	12.0	14.38	42.3	50.0	2.14
C10A-3	C50-3	15.875	10.16	9.40	5.08	57.0	59.5	15.09	18.11	66.6	77.8	3.62
C12A-3	C60-3	19.05	11.91	12.57	5.94	71.5	73.9	18.0	22.78	95.4	111.1	5.28
C16A-3	C80-3	25.4	15.88	15.75	7.92	91.7	95.1	24.0	29.29	170.1	198.4	9.10
C20A-3	C100-3	31.75	19.05	18.90	9.53	112.2	116.3	30.0	35.76	265.5	309.6	13.60
C24A-3	C120-3	38.1	22.23	25.22	11.10	141.4	145.2	35.7	45.44	381.0	437.2	20.43
C28A-3	C140-3	44.45	25.40	25.22	12.70	152.2	156.8	41.0	48.87	517.2	593.3	25.23
C32A-3	C160-3	50.8	28.58	31.55	14.27	181.8	186.6	47.8	58.55	680.4	780.6	34.19


B系列直板滾子鏈



Roller Chains With Straight Side Plates (B Series)

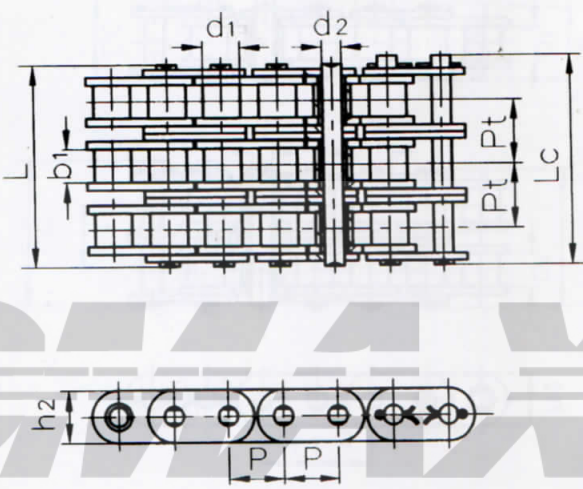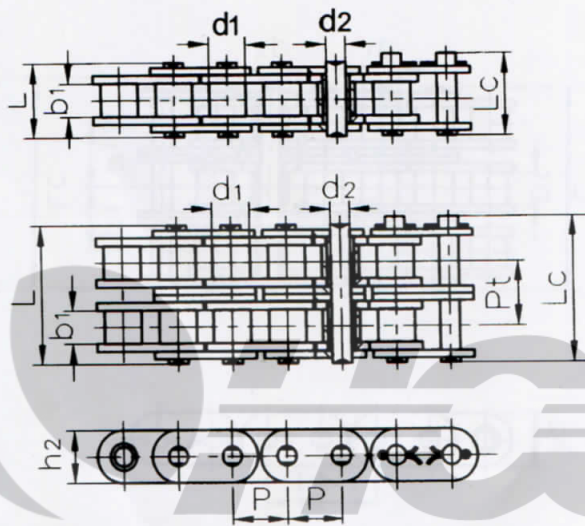

DIN ISO 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	P _t	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
C08B-1	12.7	8.51	7.75	4.45	16.7	18.2	11.8		18.0	19.5	0.80
C10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7		22.4	26.9	1.06
C12B-1	19.05	12.07	11.68	5.72	22.5	25.2	16.0		29.0	31.0	1.32
C16B-1	25.4	15.88	17.02	8.28	36.1	39.1	21.0		60.0	70.0	2.90
C20B-1	31.75	19.05	19.56	10.19	41.3	45.0	26.4		95.0	101.3	4.16
C24B-1	38.1	25.40	25.40	14.63	53.4	57.8	33.2		160.0	174.0	7.47
C28B-1	44.45	27.94	30.99	15.90	65.1	69.5	36.7		200.0	214.0	9.90
C32B-1	50.8	29.21	30.99	17.81	66.0	71.0	42.0		250.0	267.5	10.45
C08B-2	12.7	8.51	7.75	4.45	31.2	32.2	11.8	13.92	32.0	37.4	1.45
C10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	16.59	44.5	57.8	2.00
C12B-2	19.05	12.07	11.68	5.72	42.0	44.7	16.0	19.46	57.8	65.7	2.62
C16B-2	25.4	15.88	17.02	8.28	68.0	71.0	21.0	31.88	106.0	124.5	5.80
C20B-2	31.75	19.05	19.56	10.19	77.8	81.5	26.4	36.45	170.0	210.0	8.23
C24B-2	38.1	25.40	25.40	14.63	101.7	106.2	33.2	48.36	280.0	304.5	14.77
C28B-2	44.45	27.94	30.99	15.90	124.6	129.1	36.7	59.56	360.0	385.2	19.68
C32B-2	50.8	29.21	30.99	17.81	124.6	129.6	42.0	58.55	450.0	477.0	20.62
C08B-3	12.7	8.51	7.75	4.45	45.1	46.1	11.8	13.92	47.5	50.2	2.10
C10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	16.59	66.7	79.6	2.87
C12B-3	19.05	12.07	11.68	5.72	61.5	64.2	16.0	19.46	86.7	101.8	3.89
C16B-3	25.4	15.88	17.02	8.28	99.8	102.9	21.0	31.88	160.0	188.0	8.70
C20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.4	36.45	250.0	266.6	11.34
C24B-3	38.1	25.40	25.40	14.63	150.1	154.6	33.2	48.36	425.0	462.2	22.10
C28B-3	44.45	27.94	30.99	15.90	184.2	188.7	36.7	59.56	530.0	561.8	29.47
C32B-3	50.8	29.21	30.99	17.81	183.2	188.2	42.0	58.55	670.0	710.2	30.85

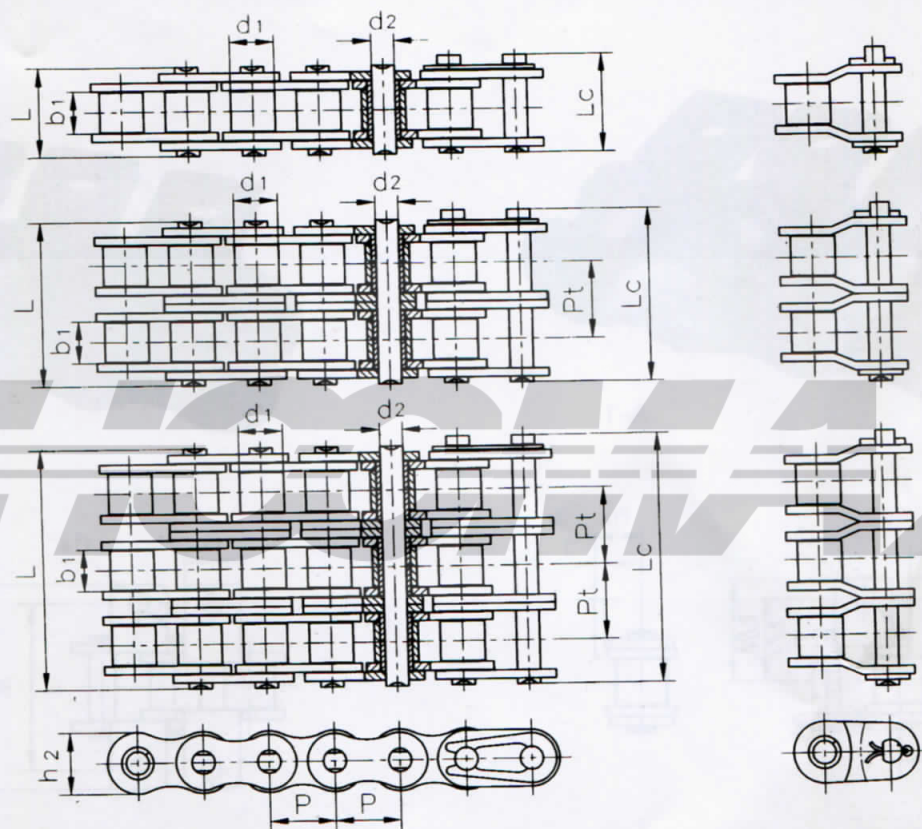


DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	排距 Transverse pitch	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d_1 max	b_1 min	d_2 max	L max	L_c max	h_2 max	P_t	Q_{min}	Q_0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
10AH-1	50H	15.875	10.16	9.40	5.08	22.1	23.4	15.09		22.2	27.5	1.25
12AH-1	60H	19.05	11.91	12.57	5.94	29.2	31.0	18.0		31.8	39.7	1.87
16AH-1	80H	25.4	15.88	15.75	7.92	36.2	37.7	24.0		56.7	67.6	3.10
20AH-1	100H	31.75	19.05	18.90	9.53	43.6	46.9	30.0		88.5	105.4	4.52
24AH-1	120H	38.1	22.23	25.22	11.10	53.5	57.5	35.7		127.0	150.7	6.60
28AH-1	140H	44.45	25.40	25.22	12.70	57.6	62.2	41.0		172.4	204.4	8.30
32AH-1	160H	50.8	28.58	31.55	14.27	68.2	73.0	47.8		226.8	266.8	10.30
12AH-2	60H-2	19.05	11.91	12.57	5.94	55.3	57.1	18.0	26.11	63.6	84.5	3.71
16AH-2	80H-2	25.4	15.88	15.75	7.92	68.8	70.3	24.0	32.59	113.4	142.3	6.15
20AH-2	100H-2	31.75	19.05	18.90	9.53	82.7	86.0	30.0	39.09	177.0	209.9	9.03
24AH-2	120H-2	38.1	22.23	25.22	11.10	102.4	106.4	35.7	48.87	254.0	296.4	13.13
28AH-2	140H-2	44.45	25.40	25.22	12.70	109.8	114.4	41.0	52.20	344.8	399.7	16.60
32AH-2	160H-2	50.8	28.58	31.55	14.27	130.1	134.9	47.8	61.90	453.6	528.6	20.20
12AH-3	60H-3	19.05	11.91	12.57	5.94	81.4	83.2	18.0	26.11	95.4	113.9	5.54
16AH-3	80H-3	25.4	15.88	15.75	7.92	101.4	102.9	24.0	32.59	170.1	203.5	9.42
20AH-3	100H-3	31.75	19.05	18.90	9.53	121.8	125.1	30.0	39.09	265.5	314.8	12.96
24AH-3	120H-3	38.1	22.23	25.22	11.10	151.2	155.2	35.7	48.87	381.0	444.7	19.64
28AH-3	140H-3	44.45	25.40	25.22	12.70	162.0	166.6	41.0	52.20	517.2	598.4	24.90
32AH-3	160H-3	50.8	28.58	31.55	14.27	192.0	196.8	47.8	61.90	680.4	787.3	30.10




A-1



K-1

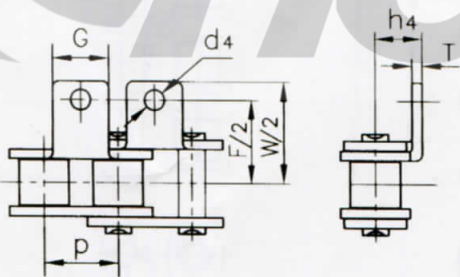


A-1

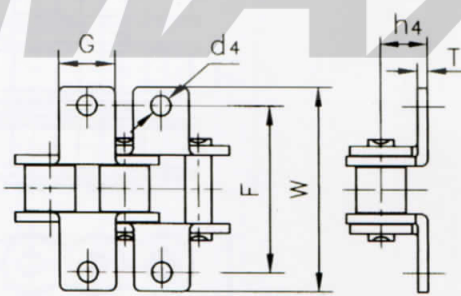

K-1

DIN ISO 鏈號	ANSI 鏈號	P	G	F	W	T	h ₄	d ₄
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
08A	40	12.7	9.5	25.4	35.2	1.5	7.9	3.4
10A	50	15.875	12.7	31.75	46.2	2.03	10.3	5.5
12A	60	19.05	15.9	38.1	55.6	2.42	11.9	5.5
16A	80	25.4	19.1	50.8	64.8	3.25	15.9	6.8
20A	100	31.75	25.4	63.5	87.3	4.0	19.8	9.2
24A	120	38.1	28.6	76.2	108.5	4.8	23.0	11.0
28A	140	44.45	34.9	88.9	123	5.6	28.6	11.4
32A	160	50.8	38.1	101.6	142.8	6.4	31.8	13.1
*06B		9.525	8.0	19.04	27	1.3	6.5	3.5
08B		12.7	9.5	25.4	36.4	1.6	8.9	4.5
10B		15.875	14.3	31.76	44.6	1.7	10.31	5.3
12B		19.05	16.0	38.1	52.4	1.85	13.46	6.4
16B		25.4	19.1	50.8	72.6	3.1	15.88	6.4


*直鏈板
*Straight side plates

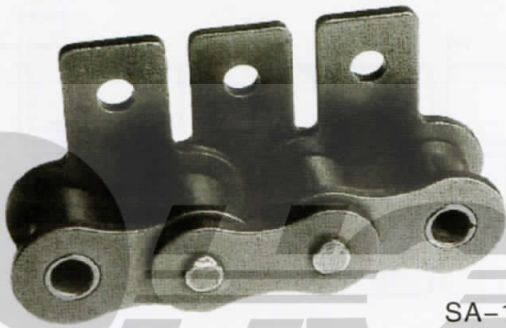


SA-1



SK-1

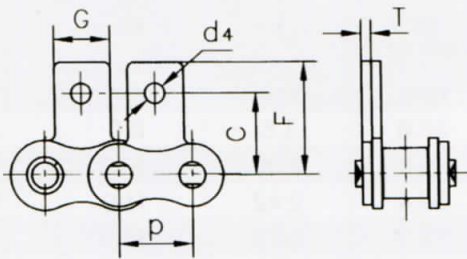

SA-1

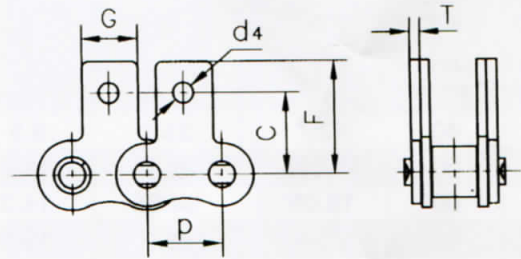


SK-1


DIN ISO 鏈號	ANSI 鏈號	P	G	C	F	T	d4
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm
08A	40	12.7	9.5	12.7	19.05	1.5	3.4
10A	50	15.875	12.7	15.9	25.25	2.03	5.5
12A	60	19.05	15.9	18.3	29.33	2.42	5.5
16A	80	25.4	19.1	24.6	34.7	3.25	6.8
20A	100	31.75	25.4	31.8	43.3	4.0	9.2
24A	120	38.1	28.6	36.5	51.6	4.8	11.0
28A	140	44.45	34.9	44.5	62.0	5.6	11.4
32A	160	50.8	38.1	50.8	69.85	6.4	13.1
*06B		9.525	8.0	9.52	13.5	1.3	3.5
08B		12.7	9.5	13.35	18.9	1.6	4.5
10B		15.875	14.3	16.5	22.95	1.7	5.3
12B		19.05	16.0	21.45	28.6	1.85	6.4
16B		25.4	19.1	23.15	34	3.1	6.4

*直鏈板


*Straight side plates

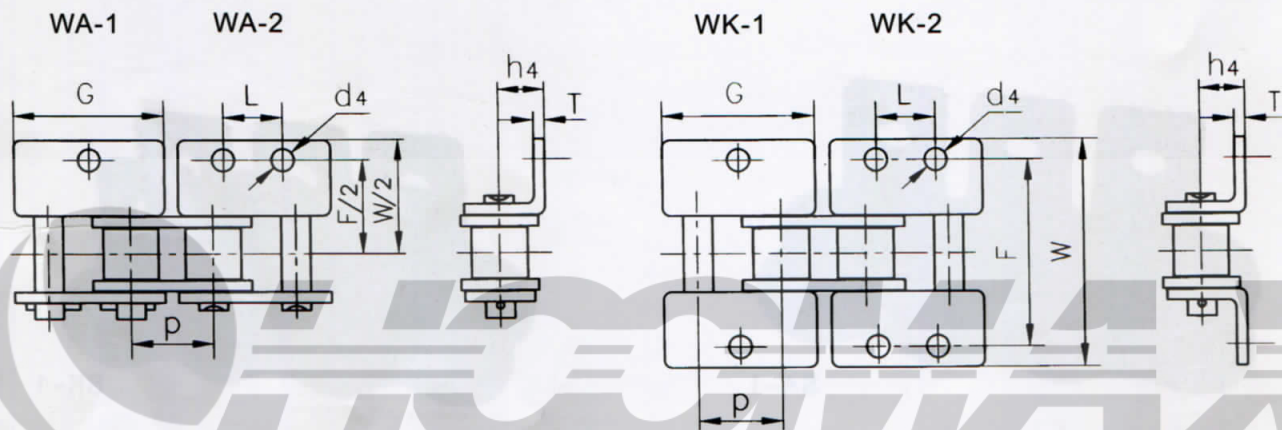


DIN ISO 鏈號	ANSI 鏈號	P	G	L	F	W	T	h ₄	d ₄
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
08A	40	12.7	23.1	9.5	25.4	35.6	1.5	8.0	4.5
10A	50	15.875	28.88	11.9	31.8	46.8	2.03	10.3	5.5
12A	60	19.05	34.65	14.3	38.1	56.4	2.42	11.9	6.6
16A	80	25.4	45.9	19.1	50.8	73.2	3.25	15.9	9.0
20A	100	31.75	57.65	23.8	63.5	89.8	4.0	19.8	11.0

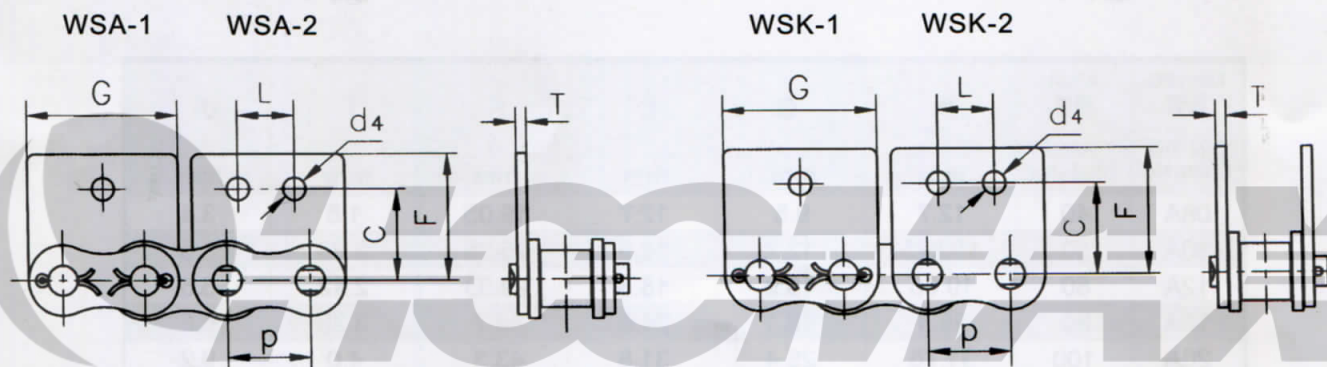



DIN ISO 鏈號	ANSI 鏈號	P	G	L	C	F	T	d ₄
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
08A	40	12.7	23.1	9.5	12.7	17.4	1.5	4.5
10A	50	15.875	28.88	11.9	15.9	23.05	2.03	5.5
12A	60	19.05	34.65	14.3	18.3	26.86	2.42	6.6
16A	80	25.4	45.9	19.1	24.6	35.45	3.25	9.0
20A	100	31.75	57.65	23.8	31.8	44.0	4.0	11.0

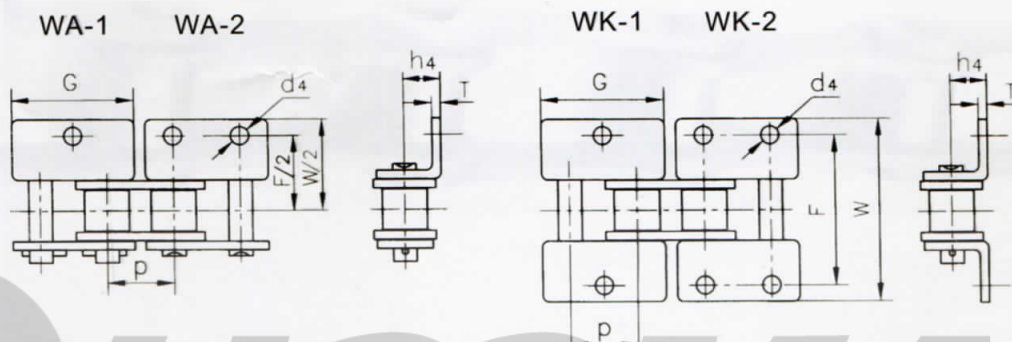

DIN ISO 鏈號	P	G	F	W	T	h ₄	d ₄
DIN ISO Chain No.	mm	mm	mm	mm	mm	mm	mm
08B	12.7	23.3	25.4	36.4	1.6	8.9	4.3
10B	15.875	29.58	31.76	44.6	1.7	10.31	5.3
12B	19.05	34.05	38.1	52.4	1.85	11.4	6.4
16B	25.4	46.4	50.8	72.6	3.1	15.88	6.4

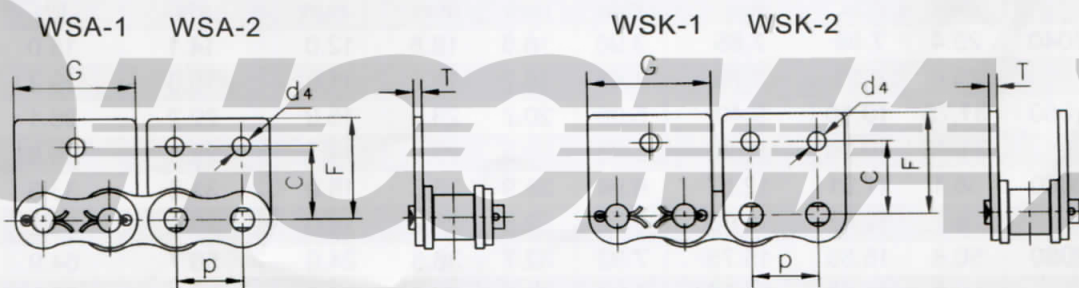


DIN ISO 鏈號	P	G	C	F	T	d ₄
DIN ISO Chain No.	mm	mm	mm	mm	mm	mm
08B	12.7	23.3	13.35	18.9	1.6	4.3
10B	15.875	29.58	16.5	22.95	1.7	5.3
12B	19.05	34.05	21.45	28.6	1.85	6.4
16B	25.4	46.4	23.15	34	3.1	6.4

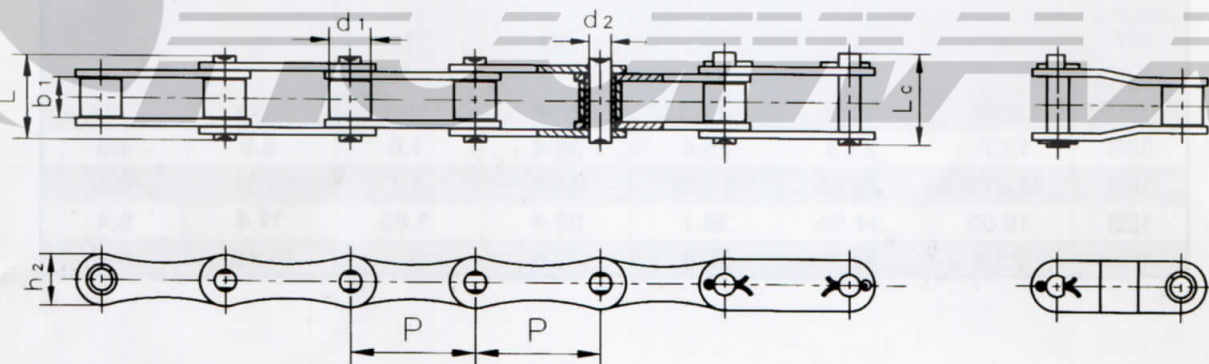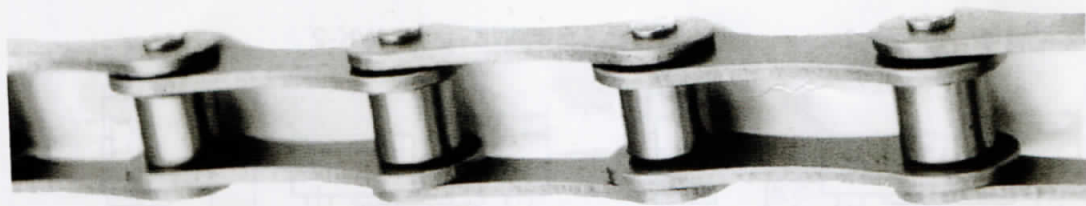


DIN ISO 鏈號	ANSI 鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
DIN ISO Chain No.	ANSI Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	Q min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
208A	2040	25.4	7.95	7.85	3.96	16.6	18.8	12.0	14.1	16.0	0.42
208B		25.4	8.51	7.75	4.45	16.7	18.2	11.8	18.0	19.3	0.45
210A	2050	31.75	10.16	9.40	5.08	20.7	23.3	15.0	22.2	26.1	0.73
210B		31.75	10.16	9.65	5.08	19.5	20.9	14.7	22.4	26.5	0.65
212A	2060	38.1	11.91	12.57	5.94	25.9	28.3	18.0	31.8	33.5	1.02
212B		38.1	12.07	11.68	5.72	22.5	25.2	16.0	29.0	32.2	0.76
216A	2080	50.8	15.88	15.75	7.92	32.7	36.5	24.0	56.7	64.9	1.70
216AH		50.8	15.88	15.75	7.92	36.2	39.4	24.0	56.7	68.8	2.17
216B		50.8	15.88	17.02	8.28	36.1	39.1	21.0	60.0	70.5	1.75
220A	2100	63.5	19.05	18.90	9.53	40.4	44.7	30.0	88.5	101.8	2.55
220B		63.5	19.05	19.56	10.19	41.3	45.0	26.4	95.0	101.3	2.62
224A	2120	76.2	22.23	25.22	11.1	50.3	54.3	35.7	127.0	147.0	4.06
224B		76.2	25.4	25.4	14.63	53.4	57.8	33.2	160.0	174.0	4.70
228B		88.9	27.94	30.99	15.90	65.1	69.5	36.7	200.0	214.0	6.23
232B		101.6	29.21	30.99	17.81	66.0	71.0	42.0	250.0	267.5	6.72




小滾子型
Small roller type

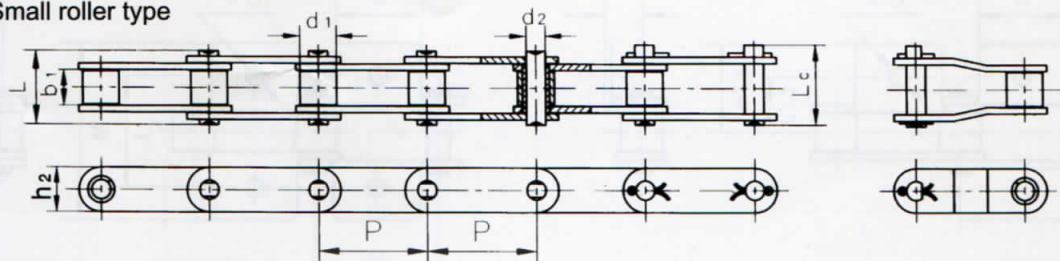

大滾子型
Large roller type

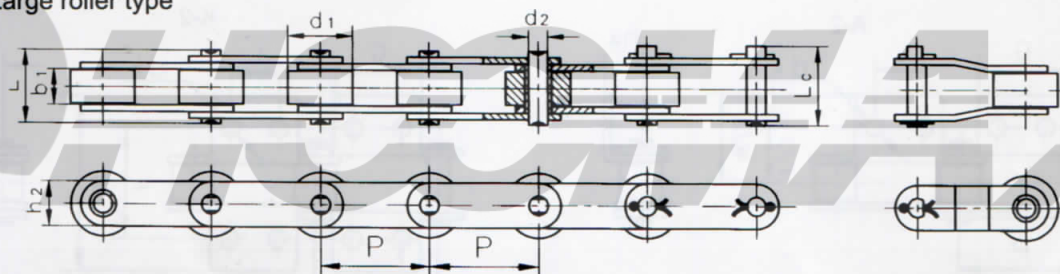


DIN ISO 鏈號 DIN ISO Chain No.	ANSI 鏈號 ANSI Chain No.	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
		P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	Q min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	kN	kN	Kg/m
C208A C208AL	C2040 C2042	25.4	7.95 15.88	7.85	3.96	16.6	18.8	12.0	14.1	16.0	0.50 0.84
C208B C208BL		25.4	8.51 15.88	7.75	4.45	16.7	18.2	11.8	18.0	19.3	0.55 0.89
C210A C210AL	C2050 C2052	31.75	10.16 19.05	9.40	5.08	20.7	23.3	15.0	22.2	26.5	0.78 1.27
C212A C212AL	C2060 C2062	38.1	11.91 22.23	12.57	5.94	25.9	28.3	18.0	31.8	35.5	1.12 1.61
C212AH C212AHL	C2060H C2062H	38.1	11.91 22.23	12.57	5.94	29.2	31.6	18.0	31.8	39.3	1.44 2.07
C216A C216AL	C2080 C2082	50.8	15.88 28.58	15.75	7.92	32.7	36.5	24.0	56.7	66.2	2.08 3.12
C216AH C216AHL	C2080H C2082H	50.8	15.88 28.58	15.75	7.92	36.2	39.4	24.4	56.7	68.8	2.54 3.58
C220A C220AL	C2100 C2102	63.5	19.05 39.67	18.90	9.53	40.4	44.7	30.0	88.5	103.6	3.01 4.83
C220AH C220AHL	C2100H C2102H	63.5	19.05 39.67	18.90	9.53	43.6	46.9	30.0	88.5	106.6	3.56 5.38
C224A C224AL	C2120 C2122	76.2	22.23 44.45	25.22	11.1	50.3	54.3	35.7	127.0	147.0	4.66 7.66
C224AH C224AHL	C2120H C2122H	76.2	22.23 44.45	25.22	11.1	53.5	57.5	35.7	127.0	151.2	5.26 8.26
C232A C232AL	C2160 C2162	101.6	28.58 57.15	31.75	14.27	64.8	69.6	47.8	226.8	260.2	8.23 11.95
C232AH C232AHL	C2160H C2162H	101.6	28.58 57.15	31.75	14.27	68.2	73.0	47.8	226.8	266.8	9.06 12.77

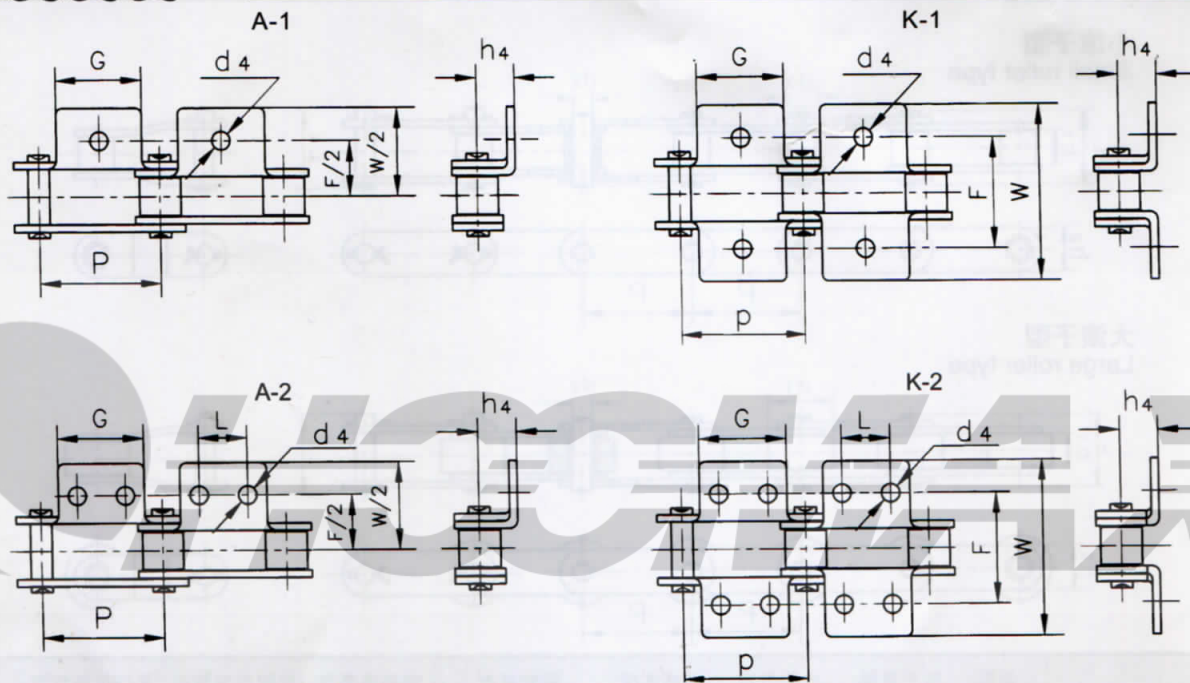


DIN ISO 鏈號	ANSI 鏈號	P	G	L	F	W	h ₄	d ₄
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.4	19.1	9.5	25.4	39.6	9.1	3.4
C208B C208BL		25.4	23.2	12.7	25.4	39.6	9.1	4.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C212A C212AL	C2060 C2062	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C212AH C212AHL	C2060H C2062H	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C216A C216AL	C2080 C2082	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C216AH C216AHL	C2080H C2082H	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C220A C220AL	C2100 C2102	63.5	47.6	23.8	66.6	107.5	23.4	8.4
C220AH C220AHL	C2100H C2102H	63.5	47.6	23.8	66.6	107.5	23.4	8.4
C224A C224AL	C2120 C2122	76.2	57.2	28.6	79.3	127.5	27.8	10.5
C224AH C224AHL	C2120H C2122H	76.2	57.2	28.6	79.3	127.5	27.8	10.5
C232A C232AL	C2160 C2162	101.6	76.2	38.1	104.7	147.5	36.5	13.1
C232AH C232AHL	C2160H C2162H	101.6	76.2	38.1	104.7	147.5	36.5	13.1




SA-1

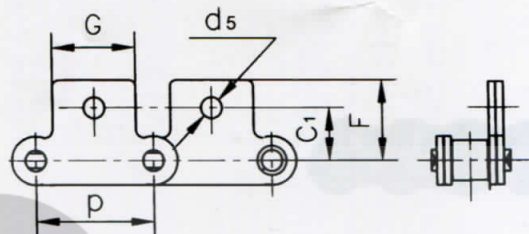


SK-1

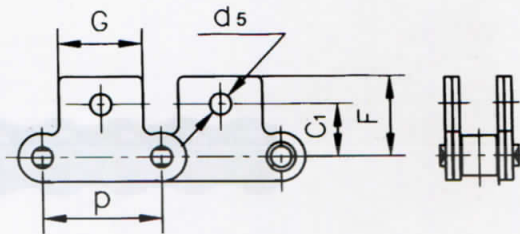

SA-2

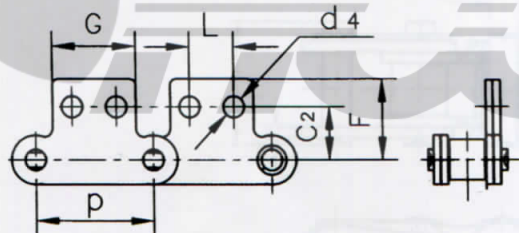


SK-2

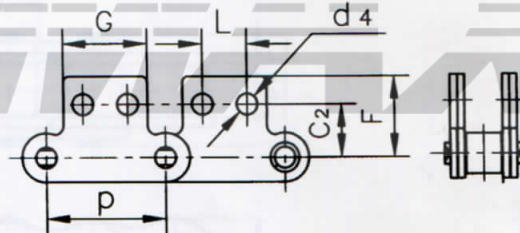

DIN ISO 鏈號	ANSI 鏈號	P	G	L	C ₁	C ₂	F	d ₄	d ₅
DIN ISO Chain No.	ANSI Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.4	19.1	9.5	11.1	13.5	20.5	3.4	5.5
C208B C208BL		25.4	23.2	12.7	11.1	13.5	20.5	4.5	5.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	14.3	15.9	25.0	5.5	6.6
C212A C212AL	C2060 C2062	38.1	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C212AH C212AHL	C2060H C2062H	38.1	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C216A C216AL	C2080 C2082	50.8	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C216AH C216AHL	C2080H C2082H	50.8	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C220A C220AL	C2100 C2102	63.5	47.6	23.8	28.6	31.8	50.4	8.4	13.0
C220AH C220AHL	C2100H C2102H	63.5	47.6	23.8	28.6	31.8	50.4	8.4	13.0

不銹鋼鏈條適合在易受食品、化學、藥品等侵蝕場合使用，還可用于高低温場合。
Stainless steel chains are suitable for corrosive conditions involving food, chemicals pharmaceuticals, etc. also suitable for high and low temperature conditions.

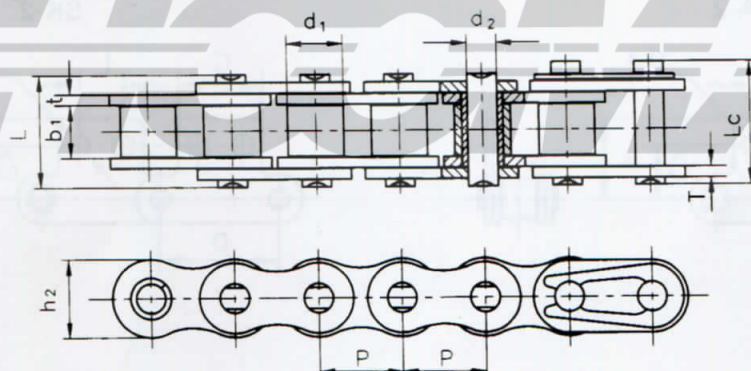

鏈號	節距	滾子直徑	內節內寬	銷軸直徑	銷軸長度		內鏈板高度	鏈板厚度	極限拉伸載荷	平均拉伸載荷	每米長重
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*35SS	9.525	5.08	4.77	3.58	12.4	13.17	9.0	1.3	5.5	6.6	0.33
40SS	12.7	7.95	7.85	3.96	16.6	17.8	12.0	1.5	9.7	11.6	0.63
50SS	15.875	10.16	9.40	5.08	20.7	22.2	15.09	2.03	15.3	18.5	1.03
60SS	19.05	11.91	12.57	5.94	25.9	27.7	18.0	2.42	21.8	26.4	1.51
80SS	25.4	15.88	15.75	7.92	32.7	35.0	24.0	3.25	38.9	46.6	2.62
100SS	31.75	19.05	18.90	9.53	40.4	44.7	30.0	4.0	59.0	70.2	3.94
#06BSS	9.525	6.35	5.72	3.28	13.15	14.1	8.2	1.3	6.2	7.3	0.41
08BSS	12.7	8.51	7.75	4.45	16.7	18.2	11.8	1.6	12.0	14.3	0.70
10BSS	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.7	14.5	17.2	0.94
12BSS	19.05	12.07	11.68	5.72	22.5	24.2	16.0	1.85	18.5	22.0	1.16
16BSS	25.4	15.88	17.02	8.28	36.1	37.4	21.0	4.15/3.1	40.0	47.6	2.13
20BSS	31.75	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	59.0	69.6	3.73

*套筒鏈: 表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.


#直鏈板

#Straight side plates



鍍鎳鏈條適合在室外雨水侵蝕等場合使用

Nickel-plated chains are suitable for outdoor conditions such as exposure to rain

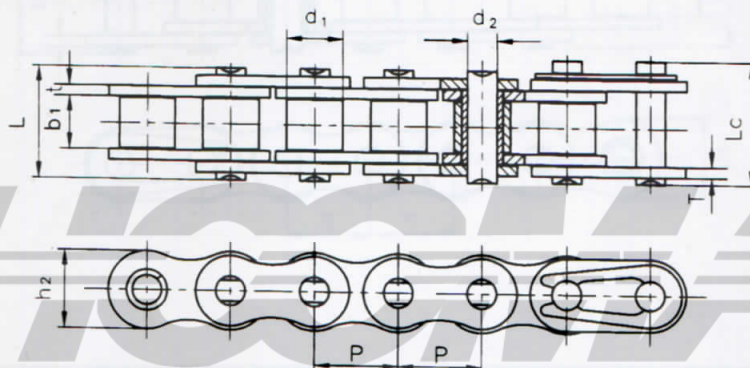

鏈號	節距	滾子直徑	內節內寬	銷軸直徑	銷軸長度		內鏈板高度	鏈板厚度	極限拉伸載荷	平均拉伸載荷	每米長重
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*25NP	6.35	3.30	3.18	2.31	7.9	8.4	6.0	0.8	3.5	4.4	0.15
*35NP	9.525	5.08	4.77	3.58	12.4	13.17	9.0	1.3	7.9	9.8	0.33
41NP	12.7	7.77	6.25	3.58	13.75	15.0	9.91	1.3	6.67	11.8	0.41
40NP	12.7	7.95	7.85	3.96	16.6	17.8	12.0	1.5	14.1	17.0	0.62
50NP	15.875	10.16	9.40	5.08	20.7	22.2	15.09	2.03	22.2	26.4	1.02
60NP	19.05	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8	38.8	1.50
80NP	25.4	15.88	15.75	7.92	32.7	35.0	24.0	3.25	56.7	64.9	2.60
100NP	31.75	19.05	18.90	9.53	40.4	44.7	30.0	4.0	88.5	101.8	3.91
04BNP	6.0	4.00	2.80	1.85	6.8	7.8	5.0	0.6	3.0	3.2	0.11
05BNP	8.0	5.00	3.00	2.31	8.2	8.9	7.1	0.8	5.0	5.8	0.20
#06BNP	9.525	6.35	5.72	3.28	13.15	14.1	8.2	1.3	9.0	10.0	0.41
08BNP	12.7	8.51	7.75	4.45	16.7	18.2	11.8	1.6	18.0	19.3	0.69
10BNP	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.7	22.4	26.5	0.93
12BNP	19.05	12.07	11.68	5.72	22.5	24.2	16.0	1.85	29.0	32.2	1.15
16BNP	25.4	15.88	17.02	8.28	36.1	37.4	21.0	4.15/3.1	60.0	70.5	2.71
20BNP	31.75	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	95.0	101.3	3.70

*套筒鏈：表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.


#直鏈板

#Straight side plates

注意：除41外，上述規格的雙排鏈、雙節距輸送鏈系列依照要求也適合鍍鎳。

Note: Double strand nickel plated chains are available in all sizes except 41chain.

Double pitch nickel plated conveyor chains are available upon request.

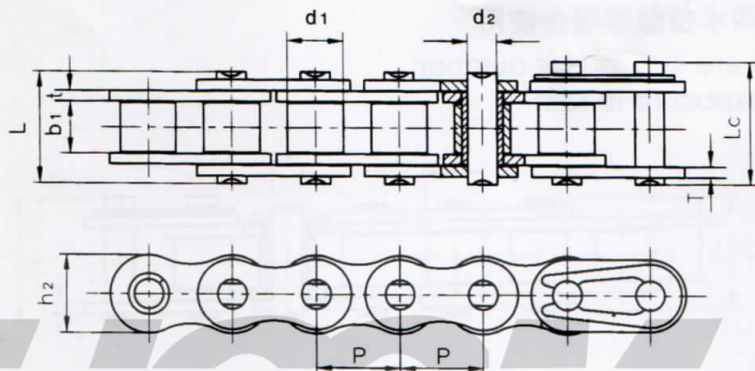

鏈號	節距 Pitch	滾子直徑 Roller diameter	內節內寬 Width between inner plates	銷軸直徑 Pin diameter	銷軸長度 Pin length		內鏈板高度 Inner plate depth	鏈板厚度 Plate thickness	極限拉伸載荷 Ultimate tensile strength	平均拉伸載荷 Average tensile strength	每米長重 Weight per meter
Chain No.	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*25ZP	6.35	3.30	3.18	2.31	7.9	8.4	6.0	0.8	3.5	3.9	0.14
*35ZP	9.525	5.08	4.77	3.58	12.4	13.17	9.0	1.3	7.9	8.7	0.33
41ZP	12.7	7.77	6.25	3.58	13.75	15.0	9.91	1.3	6.67	7.4	0.41
40ZP	12.7	7.95	7.85	3.96	16.6	17.8	12.0	1.5	13.8	15.2	0.62
50ZP	15.875	10.16	9.40	5.08	20.7	22.2	15.09	2.03	21.8	24.0	1.02
60ZP	19.05	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.1	34.2	1.50
80ZP	25.4	15.88	15.75	7.92	32.7	35.0	24.0	3.25	55.6	61.2	2.60
100ZP	31.75	19.05	18.90	9.53	40.4	44.7	30.0	4.0	86.7	95.4	3.91
04BZP	6.0	4.00	2.80	1.85	6.8	7.8	5.0	0.6	3.0	3.2	0.11
05BZP	8.0	5.00	3.00	2.31	8.2	8.9	7.1	0.8	4.4	5.5	0.20
#06BZP	9.525	6.35	5.72	3.28	13.15	14.1	8.2	1.3	8.9	9.8	0.41
08BZP	12.7	8.51	7.75	4.45	16.7	18.2	11.8	1.6	17.8	19.3	0.69
10BZP	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.7	22.2	24.6	0.93
12BZP	19.05	12.07	11.68	5.72	22.5	24.2	16.0	1.85	28.9	31.8	1.15
16BZP	25.4	15.88	17.02	8.28	36.1	37.4	21.0	4.15/3.1	60.0	66.0	2.71
20BZP	31.75	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	95.0	101.3	3.70

*套筒鏈：表中滾子直徑d₁為套筒直徑

*Bushing chain: d₁ in the table indicate the external diameter of the bushing.

#直鏈板

#Straight side plates

注意：除41外，上述規格的雙排鏈、雙節距輸送鏈系列依照要求也適合鍍鋅。

Note: Double strand zinc plated chains are available in all sizes except 41chain.

Double pitch zinc plated conveyor chains are available upon request.