


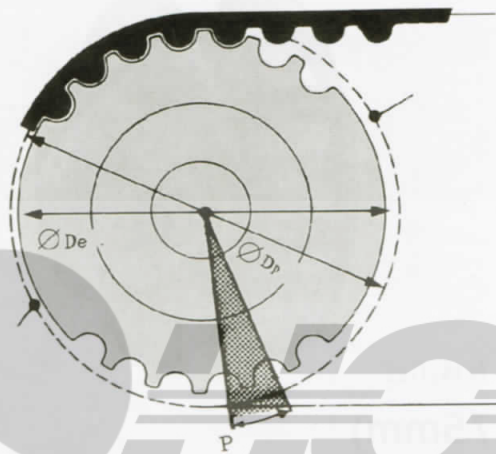


圓弧齒同步帶共有五種節距型號：
3M, 5M, 8M, 14M, 20M,
常用型號為8M與14M。

(本產品為專利產品，生產及
銷售時應注意專利生產及銷售認可)
There are 5 different types of pitches:
3M,5M,8M,14M and 20M. 8M and 14M
are more common. (The product is patent,
and must get approval of patent produc-
ing and selling when the products are
produced and sold.)

P = 節距是在皮帶輪或同步帶中心節綫上測得相鄰兩個齒的距離
Pitch is the distance measured from the central line between two
adjacent teeth of pulleys and timing pulleys.
Dp= 皮帶輪的節圓直徑 Pitch circle diameter of belt pulley.
De= 皮帶輪的實際外圓直徑 External diameter of pulley.

圓弧齒同步帶規格 SPECIFICATION OF BELT AND PULLEY	同步帶齒形尺寸 TEETH DIMENTION OF BELT
HTD 3M	
HTD 5M	
HTD 8M	
HTD 14M	
HTD 20M	

同步帶選型圖

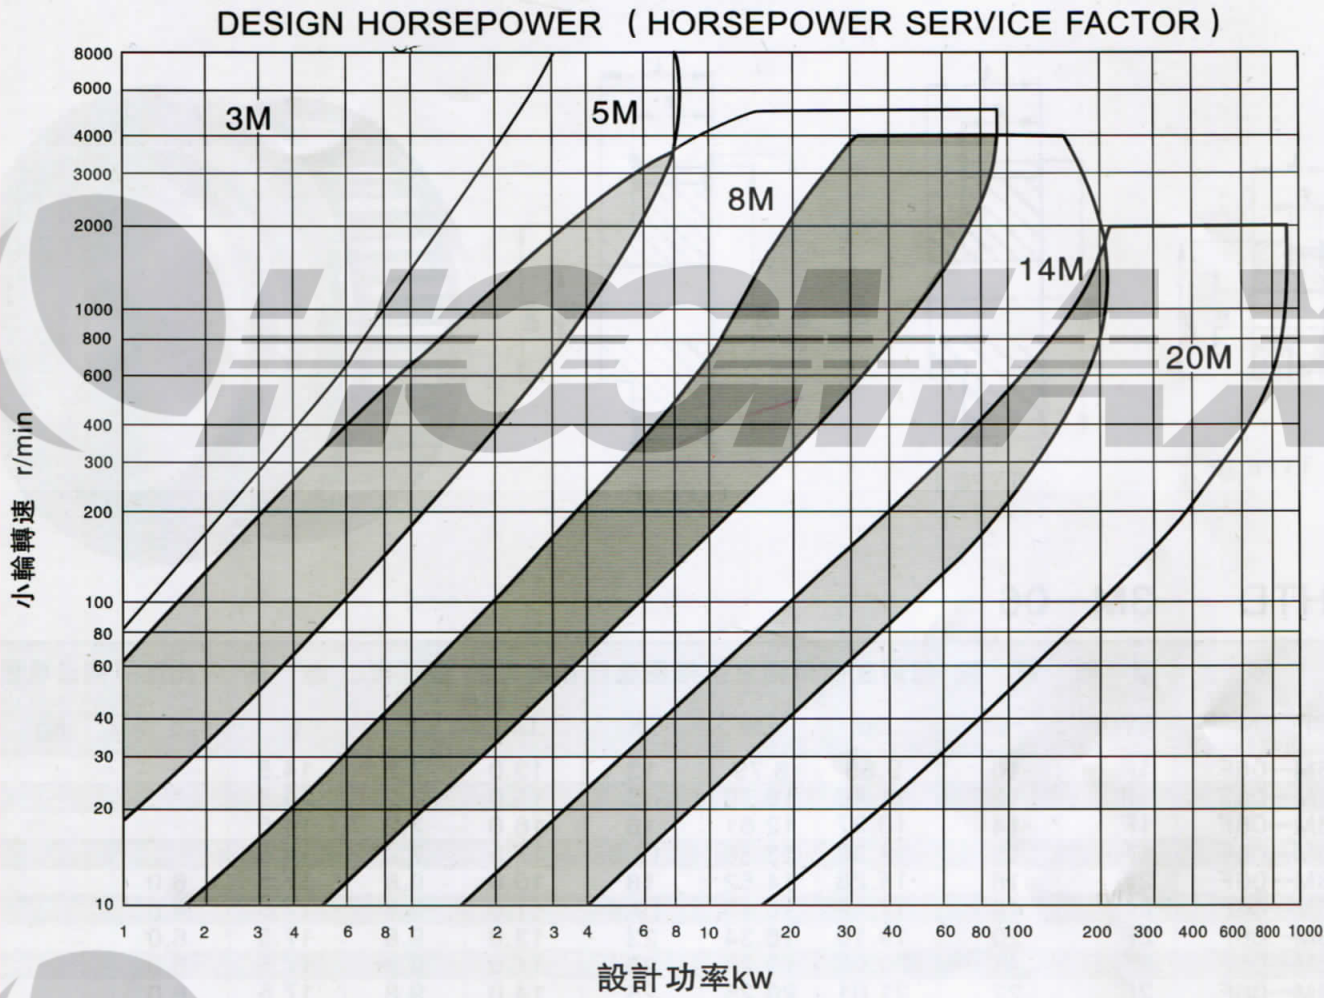

同步帶輪規格型號表示方法

SPECIFICATION AND TYPE FOR TIMING BELT PULLEY

例 如：

EXAMPLF:

30 — 8M — 30F

- F表示使用擋圈
- F INDICAES USING FLANGE
- 表示帶寬為30毫米
- INDICATING 30MM WIDTH OF BELT
- 表示節距代號
- PITCH CODE
- 表示齒數為30齒
- INDICATING TEETH NUMBER 30 TEETH

[illegible]

HTD 3M—09

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d	Kg
10—3M—09F	1F	10	9.55	8.79	13.0	13	10.2	17.5		0.004
12—3M—09F	1F	12	11.46	10.70	15.0	15	10.2	17.5		0.006
14—3M—09F	1F	14	13.37	12.61	16.0	16	10.2	17.5		0.007
15—3M—09F	1F	15	14.32	13.56	17.5	17	10.2	17.5		0.008
16—3M—09F	2F	16	15.28	14.52	18.0	10	12.8	20.6	6	0.007
18—3M—09F	2F	18	17.19	16.43	19.5	11	12.8	20.6	6	0.008
20—3M—09F	2F	20	19.10	18.34	23.0	13	12.8	20.6	6	0.010
21—3M—09F	2F	21	20.05	19.29	25.0	14	12.8	20.6	6	0.013
22—3M—09F	2F	22	21.01	20.25	25.0	14	12.8	20.6	6	0.014
24—3M—09F	2F	24	22.92	22.16	25.0	14	12.8	20.6	6	0.016
26—3M—09F	2F	26	24.83	24.07	28.0	16	12.8	20.6	6	0.018
28—3M—09F	2F	28	26.73	25.98	32.0	18	12.8	20.6	6	0.024
30—3M—09F	2F	30	28.65	27.89	32.0	20	12.8	20.6	6	0.028
32—3M—09F	2F	32	30.56	29.80	37.0	22	12.8	20.6	6	0.032
36—3M—09F	2F	36	34.38	33.62	38.0	26	13.4	22.2	6	0.045
40—3M—09F	2F	40	38.20	37.44	43.0	28	13.4	22.2	6	0.055
44—3M—09F	2F	44	42.02	41.26	48.0	33	13.4	22.2	6	0.074
48—3M—09	2	48	45.84	45.08	—	33	13.4	22.2	8	0.106
60—3M—09	2	60	57.30	56.54	—	33	13.4	22.2	8	0.106
72—3M—09	2	72	68.75	67.99	—	33	13.4	22.2	8	0.145

HTD 3M—15

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d	Kg
10—3M—15F	1F	10	9.55	8.79	13.0	13	17.0	26		0.006
12—3M—15F	1F	12	11.46	10.70	15.0	15	17.0	26		0.008
14—3M—15F	1F	14	13.37	12.61	16.0	16	17.0	26		0.010
15—3M—15F	1F	15	14.32	13.56	17.5	17	17.0	26		0.012
16—3M—15F	2F	16	15.28	14.52	18.0	10	19.5	26	6	0.010
18—3M—15F	2F	18	17.19	16.43	19.5	11	19.5	26	6	0.012
20—3M—15F	2F	20	19.10	18.34	23.0	13	19.5	26	6	0.014
21—3M—15F	2F	21	20.05	19.29	25.0	14	19.5	26	6	0.016
22—3M—15F	2F	22	21.01	20.25	25.0	14	19.5	26	6	0.018
24—3M—15F	2F	24	22.92	22.16	25.0	14	19.5	26	6	0.020
26—3M—15F	2F	26	24.83	24.07	28.0	16	19.5	26	6	0.027
28—3M—15F	2F	28	26.73	25.98	32.0	18	19.5	26	6	0.031
30—3M—15F	2F	30	28.65	27.89	32.0	20	19.5	26	6	0.035
32—3M—15F	2F	32	30.56	29.80	37.0	22	19.5	26	6	0.042
36—3M—15F	2F	36	34.38	33.62	38.0	26	20.0	30	6	0.060
40—3M—15F	2F	40	38.20	37.44	43.0	28	20.0	30	6	0.075
44—3M—15F	2F	44	42.02	41.26	48.0	33	20.0	30	6	0.095
48—3M—15	2	48	45.84	45.08	—	33	20.0	30	8	0.103
60—3M—15	2	60	57.30	56.54	—	33	20.0	30	8	0.150
72—3M—15	2	72	68.75	67.99	—	33	20.0	30	8	0.212



TYPE 4


[illegible]

HTD 5M—15


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪穀直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d	Kg
12—5M—15F	2F	12	19.10	17.96	23	13.0	20.5	26	6	0.034
14—5M—15F	2F	14	22.28	21.14	25	14.0	20.5	26	6	0.046
15—5M—15F	2F	15	23.87	22.73	28	16.0	20.5	26	6	0.056
16—5M—15F	2F	16	25.45	24.32	28	16.5	20.5	26	6	0.064
18—5M—15F	2F	18	28.65	27.51	32	20.0	20.5	26	6	0.086
20—5M—15F	2F	20	31.83	30.69	37	23.0	20.5	26	6	0.112
21—5M—15F	2F	21	33.42	32.28	38	24.0	20.5	26	6	0.130
22—5M—15F	2F	22	35.01	33.87	38	25.5	20.5	26	6	0.140
24—5M—15F	2F	24	38.20	37.06	43	27.0	20.5	28	6	0.180
26—5M—15F	2F	26	41.38	40.24	44	30.0	20.5	28	6	0.220
28—5M—15F	2F	28	44.56	43.42	48	30.5	20.5	28	6	0.250
30—5M—15F	2F	30	47.75	46.60	51	35.0	20.5	28	6	0.300
32—5M—15F	2F	32	50.93	49.79	54	38.0	20.5	28	8	0.350
36—5M—15F	2F	36	57.30	56.16	60	38.0	20.5	28	8	0.426
40—5M—15F	2F	40	63.66	62.52	70	38.0	20.5	28	8	0.520
44—5M—15	4	44	70.03	68.89	—	38.0	20.5	30	8	0.225
48—5M—15	4	48	76.39	75.25	—	38.0	20.5	30	8	0.287
60—5M—15	4	60	95.49	94.35	—	50.0	20.5	30	8	0.305
72—5M—15	4	72	114.59	113.45	—	50.0	20.5	30	8	0.365

HTD 5M—25


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪穀直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d	Kg
12—5M—25F	2F	12	19.10	17.96	23	13.0	30.5	36.0	6	
14—5M—25F	2F	14	22.28	21.14	25	14.0	30.5	36.0	6	
15—5M—25F	2F	15	23.87	22.73	28	16.0	30.5	36.0	6	
16—5M—25F	2F	16	25.45	24.32	28	16.5	30.5	36.0	6	
18—5M—25F	2F	18	28.65	27.51	32	20.0	30.5	36.0	6	
20—5M—25F	2F	20	31.83	30.69	37	23.0	30.5	36.0	6	
21—5M—25F	2F	21	33.42	32.28	38	24.0	30.5	38.0	6	
22—5M—25F	2F	22	35.01	33.87	38	25.5	30.5	38.0	6	
24—5M—25F	2F	24	38.20	37.06	43	27.0	30.5	38.0	6	
26—5M—25F	2F	26	41.38	40.24	44	30.0	30.5	38.0	6	
28—5M—25F	2F	28	44.56	43.42	48	30.5	30.5	38.0	6	
30—5M—25F	2F	30	47.75	46.60	51	35.0	30.5	38.0	6	
32—5M—25F	2F	32	50.93	49.79	54	38.5	30.5	38.0	8	
36—5M—25F	2F	36	57.30	56.16	60	38.0	30.5	38.0	8	
40—5M—25F	2F	40	63.66	62.52	70	38.0	30.5	38.0	8	
44—5M—25	4	44	70.03	68.89	—	38.0	30.5	40.0	8	
48—5M—25	4	48	76.39	75.25	—	38.0	30.5	40.0	8	
60—5M—25	4	60	95.49	94.35	—	50.0	30.5	40.0	8	
72—5M—25	4	72	114.59	113.45	—	50.0	30.5	40.0	8	

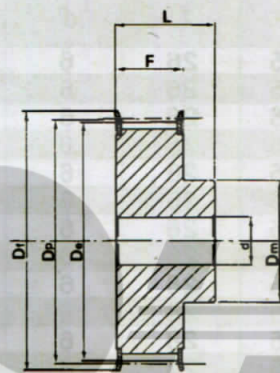


2F

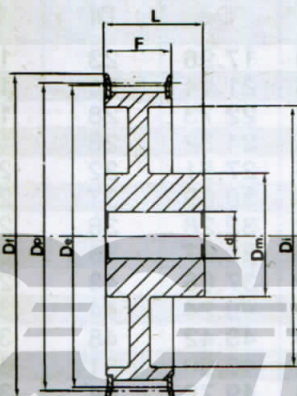


3F

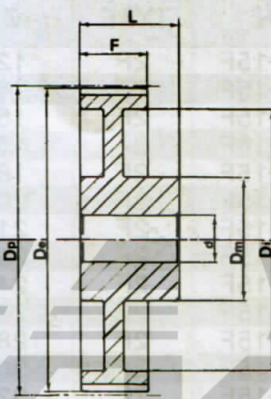


4

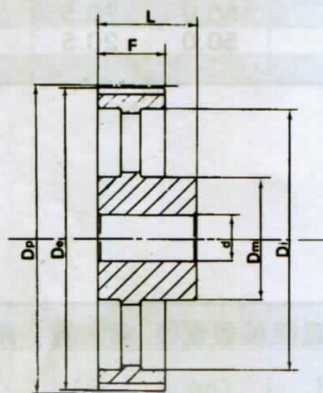


5

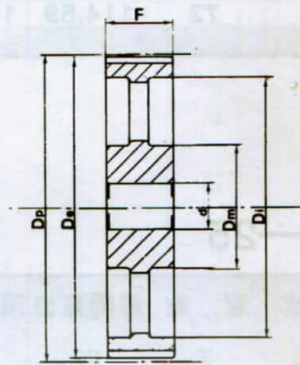

7

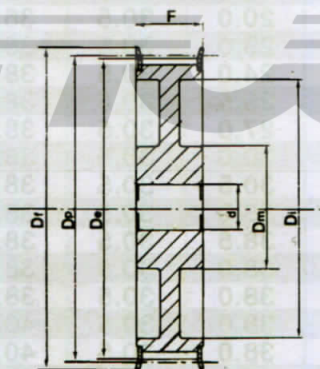

6F

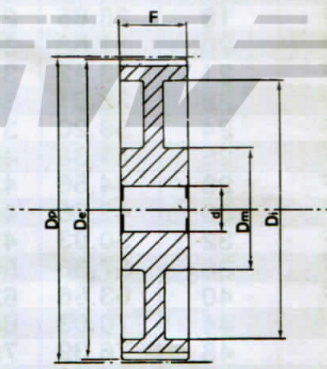

6

HTD 8M—20

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
22—8M—20F	2F	22	56.02	54.65	60	43	—	28	38	12	0.54
24—8M—20F	2F	24	61.12	59.75	67	45	—	28	38	12	0.65
26—8M—20F	2F	26	66.21	64.85	70	50	—	28	38	12	0.80
28—8M—20F	2F	28	71.30	70.08	75	50	—	28	38	16	0.87
30—8M—20F	2F	30	76.39	75.13	83	55	—	28	38	16	1.02
32—8M—20F	2F	32	81.49	80.16	87	60	—	28	38	16	1.20
34—8M—20F	2F	34	86.58	85.22	91	70	—	28	38	16	1.40
36—8M—20F	2F	36	91.67	90.30	97	70	—	28	38	16	1.55
38—8M—20F	2F	38	96.77	95.39	102	75	—	28	38	16	1.65
40—8M—20F	2F	40	101.86	100.49	106	75	—	28	38	16	1.74
44—8M—20F	2F	44	112.05	110.67	120	75	—	28	38	16	2.10
48—8M—20F	2F	48	122.23	120.86	128	75	—	28	38	16	2.44
56—8M—20F	3F	56	142.60	141.23	150	80	117	28	38	16	2.60
64—8M—20F	3F	64	162.97	161.60	168	80	137	28	38	16	2.90
72—8M—20F	3F	72	183.35	181.97	192	80	158	28	38	16	3.10
80—8M—20	4	80	203.72	202.35	—	90	180	28	38	16	3.80
90—8M—20	4	90	229.18	227.81	—	90	204	28	38	16	4.20
112—8M—20	5	112	285.21	283.83	—	90	260	28	38	16	5.20
144—8M—20	5	144	366.69	365.32	—	90	341	28	38	20	7.50
168—8M—20	5	168	427.81	426.44	—	100	402	28	38	20	10.00
192—8M—20	5	192	488.92	487.55	—	100	463	28	38	20	14.40

HTD 8M—30


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
22—8M—30F	2F	22	56.02	54.65	60	43	—	38	48	12	0.69
24—8M—30F	2F	24	61.12	59.75	67	45	—	38	48	12	0.84
26—8M—30F	2F	26	66.21	64.85	70	50	—	38	48	12	1.00
28—8M—30F	2F	28	71.30	70.08	75	50	—	38	48	16	1.12
30—8M—30F	2F	30	76.39	75.13	83	55	—	38	48	16	1.32
32—8M—30F	2F	32	81.49	80.16	87	60	—	38	48	16	1.53
34—8M—30F	2F	34	86.58	85.52	91	70	—	38	48	16	1.80
36—8M—30F	2F	36	91.67	90.30	97	70	—	38	48	16	1.99
38—8M—30F	2F	38	96.77	95.39	102	75	—	38	48	16	2.27
40—8M—30F	2F	40	101.86	100.49	106	75	—	38	48	16	2.40
44—8M—30F	2F	44	112.05	110.67	120	75	—	38	48	16	2.80
48—8M—30F	2F	48	122.23	120.86	128	75	—	38	48	16	3.20
56—8M—30F	3F	56	142.60	141.23	150	80	117	38	48	16	3.60
64—8M—30F	3F	64	162.97	161.60	168	80	138	38	48	16	4.30
72—8M—30F	3F	72	183.35	181.97	192	80	158	38	48	16	4.80
80—8M—30	4	80	203.72	202.35	—	90	180	38	48	16	5.10
90—8M—30	4	90	229.18	227.81	—	90	204	38	48	16	5.70
112—8M—30	5	112	285.21	283.83	—	90	260	38	48	16	6.80
144—8M—30	5	144	366.69	365.32	—	90	341	38	48	20	9.30
168—8M—30	5	168	427.81	426.44	—	100	402	38	48	20	11.40
192—8M—30	5	192	488.92	487.55	—	100	463	38	48	20	16.00

HTD 8M—50


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圈直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
22—8M—50F	2F	22	56.02	54.65	60	43	—	60	70	12	1.00
24—8M—50F	2F	24	61.12	59.75	67	45	—	60	70	12	1.23
26—8M—50F	2F	26	66.21	64.84	70	50	—	60	70	12	1.50
28—8M—50F	2F	28	71.30	70.08	75	50	—	60	70	16	1.67
30—8M—50F	2F	30	76.39	75.13	83	55	—	60	70	16	1.97
32—8M—50F	2F	32	81.49	80.16	87	60	—	60	70	16	2.27
34—8M—50F	2F	34	86.58	85.22	91	70	—	60	70	16	2.69
36—8M—50F	2F	36	91.67	90.30	97	70	—	60	70	16	2.97
38—8M—50F	2F	38	96.77	95.39	102	75	—	60	70	16	3.23
40—8M—50F	2F	40	101.86	100.49	106	75	—	60	70	18	3.50
44—8M—50F	2F	44	112.05	110.67	120	75	—	60	70	18	3.90
48—8M—50F	2F	48	122.23	120.86	128	80	—	60	70	18	4.30
56—8M—50F	6F	56	142.60	141.23	150	90	117	60	60	18	5.00
64—8M—50F	6F	64	162.97	161.60	168	100	137	60	60	18	5.60
72—8M—50F	6F	72	183.35	181.97	192	100	158	60	60	18	6.80
80—8M—50	7	80	203.72	202.35	—	110	180	60	60	18	6.90
90—8M—50	7	90	229.18	227.81	—	110	204	60	60	18	8.60
112—8M—50	7	112	285.21	283.83	—	110	260	60	60	18	9.60
144—8M—50	7	144	366.69	365.32	—	110	341	60	60	20	13.80
168—8M—50	7	168	427.81	426.44	—	120	402	60	60	20	16.00
192—8M—50	7	192	488.92	487.55	—	130	463	60	60	20	22.40

HTD 8M—85


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圈直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
22—8M—85F	2F	22	56.02	54.65	60	43	—	95	105	12	1.55
24—8M—85F	2F	24	61.12	59.75	67	45	—	95	105	12	1.90
26—8M—85F	2F	26	66.21	64.84	70	50	—	95	105	12	2.25
28—8M—85F	2F	28	71.30	70.08	75	50	—	95	105	16	2.55
30—8M—85F	2F	30	76.39	75.13	83	55	—	95	105	16	3.00
32—8M—85F	2F	32	81.49	80.16	87	60	—	95	105	16	3.57
34—8M—85F	2F	34	86.58	85.22	91	70	—	95	105	16	4.00
36—8M—85F	2F	36	91.67	90.30	97	70	—	95	105	16	4.50
38—8M—85F	2F	38	96.77	95.39	102	75	—	95	105	16	4.90
40—8M—85F	2F	40	101.86	100.49	106	75	—	95	105	16	5.20
44—8M—85F	2F	44	112.05	110.67	120	75	—	95	105	18	6.60
48—8M—85F	2F	48	122.23	120.86	128	80	—	95	105	18	7.60
56—8M—85F	2F	56	142.60	141.23	150	90	—	95	105	18	9.80
64—8M—85F	6F	64	162.97	161.60	168	100	137	95	95	20	10.40
72—8M—85F	6F	72	183.35	181.97	192	100	158	95	95	20	11.40
80—8M—85	7	80	203.72	202.35	—	110	180	95	95	20	13.20
90—8M—85	7	90	229.18	227.81	—	110	204	95	95	20	16.30
112—8M—85	7	112	285.21	283.83	—	110	260	95	95	25	21.50
144—8M—85	7	144	366.69	365.32	—	110	341	95	95	25	23.60
168—8M—85	7	168	427.81	426.44	—	120	402	95	95	25	26.10
192—8M—85	7	192	488.92	487.55	—	130	463	95	95	25	30.60

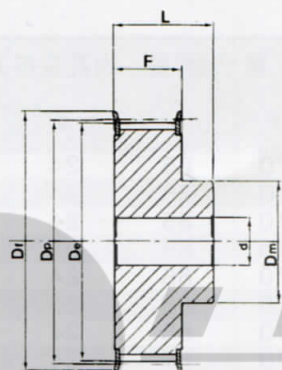

TYPE 2F

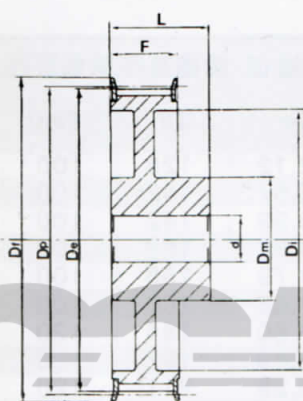

TYPE 3F

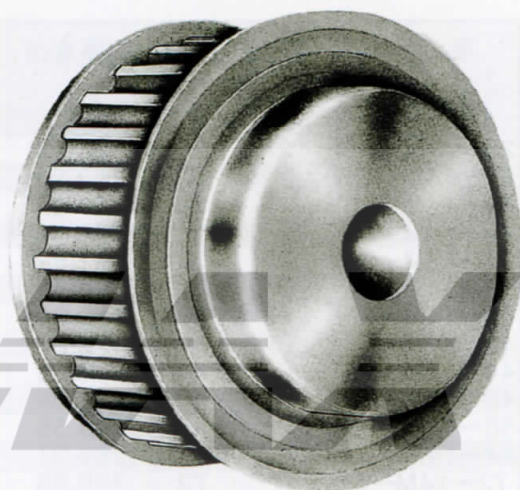

HTD 14M—40

[illegible]

HTD 14M—55

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
28—14M—55F	2F	28	124.78	122.12	128	100	—	70	85	24	5.60
29—14M—55F	2F	29	129.23	126.57	142	100	—	70	85	24	6.10
30—14M—55F	2F	30	133.69	130.99	142	100	—	70	85	24	6.60
32—14M—55F	2F	32	142.60	139.88	158	100	—	70	85	24	7.60
34—14M—55F	2F	34	151.52	148.79	158	100	—	70	85	24	8.60
36—14M—55F	2F	36	160.43	157.68	168	100	—	70	85	24	9.60
38—14M—55F	2F	38	169.34	166.60	184	120	—	70	85	24	10.80
40—14M—55F	2F	40	178.25	175.49	192	120	—	70	85	24	11.20
44—14M—55F	2F	44	196.08	193.28	211	120	—	70	85	24	12.50
48—14M—55F	6F	48	213.90	211.11	226	135	172	70	70	24	13.70
56—14M—55F	6F	56	249.55	246.76	265	135	207	70	70	28	14.50
64—14M—55F	6F	64	285.21	282.41	296	135	242	70	70	28	15.60
72—14M—55	7	72	320.86	318.06	—	135	278	70	70	28	16.90
80—14M—55F	7	80	356.51	353.71	—	135	314	70	70	28	20.00
90—14M—55	7	90	401.07	398.28	—	135	358	70	70	28	22.60
112—14M—55	7	112	499.11	496.32	—	135	456	70	70	28	29.50
144—14M—55	7	144	641.71	638.92	—	135	600	70	70	28	39.00
168—14M—55	7	168	748.66	745.87	—	135	706	70	70	28	48.50
192—14M—55	7	192	855.62	852.82	—	135	813	70	70	28	57.80
216—14M—55	7	216	962.57	959.76	—	150	920	70	70	28	67.00

HTD 14M—85


規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
28—14M—85F	2F	28	124.78	122.12	128	100	—	102	117	24	7.70
29—14M—85F	2F	29	129.23	126.57	142	100	—	102	117	24	8.40
30—14M—85F	2F	30	133.69	130.99	142	100	—	102	117	24	9.10
32—14M—85F	2F	32	142.60	139.88	158	100	—	102	117	24	10.50
34—14M—85F	2F	34	151.52	148.79	158	100	—	102	117	24	11.90
36—14M—85F	2F	36	160.43	157.68	168	100	—	102	117	32	13.20
38—14M—85F	2F	38	169.34	166.60	184	120	—	102	117	32	15.15
40—14M—85F	2F	40	178.25	175.49	192	135	—	102	117	32	17.10
44—14M—85F	2F	44	196.08	193.28	211	135	—	102	117	32	23.30
48—14M—85F	2F	48	213.90	211.11	226	150	—	102	117	32	25.00
56—14M—85F	6F	56	249.55	246.76	265	150	207	102	102	32	25.00
64—14M—85F	6F	64	285.21	282.41	296	150	242	102	102	32	30.50
72—14M—85	7	72	320.86	318.06	—	150	278	102	102	32	28.80
80—14M—85	7	80	356.51	353.71	—	150	314	102	102	32	30.10
90—14M—85	7	90	401.07	398.28	—	150	358	102	102	32	33.00
112—14M—85	7	112	499.11	496.32	—	150	456	102	102	32	41.80
144—14M—85	7	144	641.71	638.92	—	150	600	102	102	32	52.40
168—14M—85	7	168	748.66	745.87	—	150	706	102	102	32	60.30
192—14M—85	7	192	855.62	852.82	—	165	813	102	102	32	70.20
216—14M—85	7	216	962.57	959.76	—	165	920	102	102	32	81.00

HTD 14M—115

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
28-14M-115F	2F	28	124.78	122.12	128	100	—	133	148	32	9.20
29-14M-115F	2F	29	129.23	126.57	142	100	—	133	148	32	10.20
30-14M-115F	2F	30	133.69	130.99	142	100	—	133	148	32	11.20
32-14M-115F	2F	32	142.60	139.88	158	100	—	133	148	32	13.20
34-14M-115F	2F	34	151.52	148.79	158	100	—	133	148	32	14.80
36-14M-115F	2F	36	160.43	157.68	168	100	—	133	148	32	16.60
38-14M-115F	2F	38	169.34	166.60	184	120	—	133	148	32	19.20
40-14M-115F	2F	40	178.25	175.49	192	135	—	133	148	32	20.56
44-14M-115F	2F	44	196.08	193.28	211	140	—	133	148	32	21.93
48-14M-115F	2F	48	213.90	211.11	226	150	—	133	148	32	25.00
56-14M-115F	2F	56	249.55	246.76	265	150	—	133	148	32	27.50
64-14M-115F	6F	64	285.21	282.41	296	150	242	133	133	32	30.10
72-14M-115	7	72	320.86	318.06	—	150	278	133	133	32	32.83
80-14M-115	7	80	356.51	353.71	—	150	314	133	133	32	35.55
90-14M-115	7	90	401.07	398.28	—	150	358	133	133	32	41.00
112-14M-115	7	112	499.11	496.32	—	150	456	133	133	32	54.40
144-14M-115	7	144	641.71	638.92	—	165	600	133	133	32	67.80
168-14M-115	7	168	748.66	745.87	—	165	706	133	133	32	75.80
192-14M-115	7	192	855.62	852.82	—	165	813	133	133	32	88.30
216-14M-115	7	216	962.57	959.76	—	165	920	133	133	32	98.00

HTD 14M—170

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圓直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
28-14M-170F	2F	28	124.78	122.12	128	100	—	187	202	32	13.80
29-14M-170F	2F	29	129.23	126.57	142	100	—	187	202	32	14.20
30-14M-170F	2F	30	133.69	130.99	142	100	—	187	202	32	15.60
32-14M-170F	2F	32	142.60	139.88	158	100	—	187	202	32	18.10
34-14M-170F	2F	34	151.52	148.79	158	100	—	187	202	32	20.40
36-14M-170F	2F	36	160.43	157.68	168	120	—	187	202	32	23.50
38-14M-170F	2F	38	169.34	166.60	184	135	—	187	202	32	26.50
40-14M-170F	2F	40	178.25	175.49	192	135	—	187	202	32	30.10
44-14M-170F	2F	44	196.08	193.28	211	160	—	187	202	32	37.80
48-14M-170F	2F	48	213.90	211.11	226	160	—	187	202	32	44.50
56-14M-170F	2F	56	249.55	246.76	265	160	—	187	202	32	61.00
64-14M-170F	2F	64	285.21	282.41	296	180	—	187	202	32	81.00
72-14M-170	6	72	320.86	318.06	—	180	278	187	187	32	61.40
80-14M-170	6	80	356.51	353.71	—	180	314	187	187	32	65.00
90-14M-170	7	90	401.07	398.28	—	180	358	187	187	38	68.00
112-14M-170	7	112	499.11	496.32	—	200	456	187	187	38	87.50
144-14M-170	7	144	641.71	638.92	—	220	600	187	187	38	114.00
168-14M-170	7	168	748.66	745.87	—	220	706	187	187	38	125.00
192-14M-170	7	192	855.62	852.82	—	220	813	187	187	38	136.40
216-14M-170	7	216	962.57	959.76	—	220	920	187	187	38	147.00

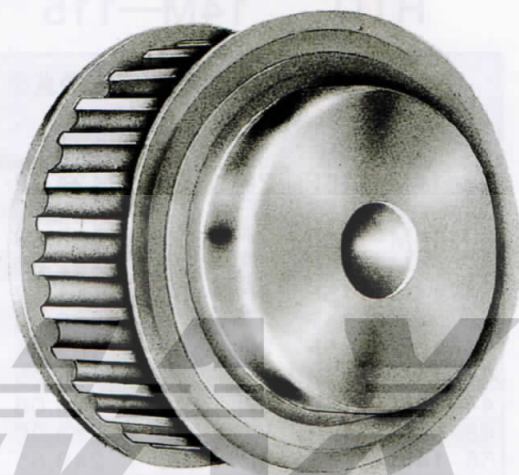

HTD 20M—115

[illegible]

HTD 20M—170

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圈直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
34-20M-170F	2F	34	216.45	212.13	240	165	—	190.5	222.5	38	44.8
36-20M-170F	2F	36	229.18	224.87	250	178	—	190.5	222.5	38	50.5
38-20M-170F	2F	38	241.92	237.60	265	181	—	190.5	222.5	38	55.0
40-20M-170F	2F	40	254.65	250.33	275	203	—	190.5	222.5	38	
44-20M-170F	2F	44	280.11	275.79	300	210	—	190.5	222.5	38	
48-20M-170F	2F	48	305.58	301.26	325	240	—	190.5	222.5	38	
52-20M-170F	2F	52	331.04	326.72	350	280	—	190.5	222.5	38	
56-20M-170F	2F	56	356.51	352.19	375	280	—	190.5	222.5	38	
60-20M-170F	2F	60	381.97	377.65	405	280	—	190.5	222.5	38	
64-20M-170F	2F	64	407.44	403.12	430	280	—	190.5	222.5	38	
68-20M-170F	2F	68	432.90	428.58	455	280	—	190.5	222.5	38	
72-20M-170F	7F	72	458.37	454.05	480	280	394	190.5	190.5	38	
80-20M-170F	7F	80	509.30	504.98	530	280	445	190.5	190.5	38	
90-20M-170F	7F	90	572.96	568.64	595	280	508	190.5	190.5	38	
112-20M-170	7	112	713.01	708.70	—	300	648	190.5	190.5	38	
144-20M-170	7	144	916.73	912.41	—	300	852	190.5	190.5	44	
168-20M-170	7	168	1069.52	1065.21	—	350	1005	190.5	190.5	44	
192-20M-170	7	192	1222.31	1218.00	—	350	1158	190.5	190.5	48	
216-20M-170	7	216	1375.10	1370.78	—	350	1300	190.5	190.5	48	

HTD 20M—230

規 格	型 號	齒 數	節圓直徑	頂圓直徑	擋圈直徑	輪轂直徑	內圈直徑	齒 寬	總 長	內孔直徑	成品單重
SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d	Kg
38-20M-230F	2F	38	241.92	237.60	265	181	—	250.8	282.8	38	67.5
40-20M-230F	2F	40	254.65	250.33	275	203	—	250.8	282.8	38	
44-20M-230F	2F	44	280.11	275.79	300	210	—	250.8	282.8	38	
48-20M-230F	2F	48	305.58	301.26	325	228	—	250.8	282.8	38	
52-20M-230F	2F	52	331.04	326.72	350	280	—	250.8	282.8	38	
56-20M-230F	2F	56	356.51	352.19	375	280	—	250.8	282.8	38	
60-20M-230F	2F	60	381.97	377.65	405	280	—	250.8	282.8	38	
64-20M-230F	2F	64	407.44	403.12	430	300	—	250.8	282.8	38	
68-20M-230F	2F	68	432.90	428.58	455	300	—	250.8	282.8	38	
72-20M-230F	2F	72	458.37	454.05	480	300	—	250.5	282.8	38	
80-20M-230F	6F	80	509.30	504.98	530	300	445	250.5	282.8	38	
90-20M-230F	7F	90	572.96	568.64	595	300	508	250.8	282.8	38	
112-20M-230	7	112	713.01	708.70	—	300	648	250.8	282.8	38	
144-20M-230	7	144	916.73	912.41	—	350	852	250.8	282.8	44	
168-20M-230	7	168	1069.52	1065.21	—	350	1005	250.8	282.8	44	
192-20M-230	7	192	1222.31	1218.00	—	400	1158	250.8	282.8	48	
219-20M-230	7	216	1375.10	1370.78	—	400	1300	250.8	282.8	48	
