



PILLOW BLOCKS

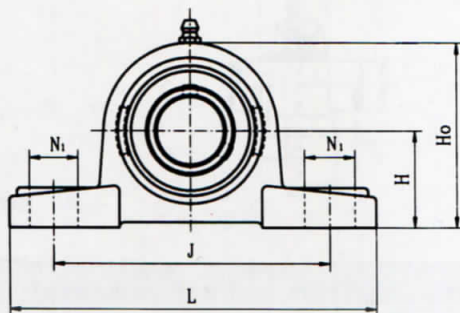



UCP

Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)											Bolt Size	Bearing No.	Housing No.	Mass (kg)	Available	
	d (in.)	(mm)	H	L	J	A	N	N ₁	H ₁	H ₀	S	B	N					N ₁	
UCP 202 202-10 203 203-11	5/8 11/16	15 17	30.2	125	96	32	12	16	13	57	11.5	27.4	M10	UC 202 202-10 203 203-11	P203	0.6	--	--	
UCP 204-12 204	3/4	20	33.3	127	96	37	13	16	14	63.8	12.7	31	M10	UC 204-12 204	P204	0.65	13	19	
UCP 205-14 205-15 205 205-16	7/8 15/16 1	25	36.5	140	105	38	13	16	15	69.5	14.3	34.1	M10	UC 205-14 205-15 205 205-16	P205	0.72	--	--	
UCP 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	42.9	160	121	44	14	19	16	82	15.9	38.1	M12	UC 206-18 206 206-19 206-20	P206	1.15	17	21	
UCP 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	47.6	167	126	48	14	19	17	92	17.5	42.9	M12	UC 207-20 207-21 207-22 207 207-23	P207	1.53	17	21	
UCP 208-24 208-25 208	1-1/2 1-9/16	40	49.2	180	136	52	14	19	18	98	19	49.2	M12	UC 208-24 208-25 208	P208	1.88	17	23	
UCP 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	54	189	146	54	14	19	20	105.5	19	49.2	M12	UC 209-26 209-27 209-28 209	P209	2.1	17	23	
UCP 210-30 210-31 210	1-7/8 1-15/16	50	57.2	204	159	57	19	20.5	21	112.2	19	51.6	M16	UC 210-30 210-31 210	P210	2.5	--	--	
UCP 211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	63.5	217	172	60	19	20.5	22	124.5	22.2	55.6	M16	UC 211-32 211-34 211 211-35	P211	3.3	--	--	
UCP 212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	69.9	238	186	66	19	22	24	137	25.4	65.1	M16	UC 212-36 212 212-38 212-39	P212	5.5	--	--	
UCP 213-40 213	2-1/2	65	76.2	262	203	70	23	24	26	149	25.4	65.1	M20	UC 213-40 213	P213	5.6	25	29	
UCP 214-44 214	2-3/4	70	79.4	266	210	72	23	24	27	155	30.2	74.6	M20	UC 214-44 214	P214	6.6	25	29	
UCP 215 215-48	3	75	82.6	274	217	74	24	24	28	161.6	33.3	77.8	M20	UC 215 215-48	P215	7.3	--	--	
UCP 216		80	88.9	292	232	78	24	24	30	174	33.3	82.6	M20	UC 216	P216	8.3	--	--	
UCP 217-52 217	3-1/4	85	95.2	310	247	83	25	24	32	186	34.1	85.7	M20	UC 217-52 217	P217	10.8	--	--	
UCP 218-56 218	3-1/2	90	101.6	326	262	88	27	34	33	198	39.7	96	M22	UC 218-56 218	P218	13	27	33	

Note: Grease fittings can locate at 45° position of housings front right side



PILLOW BLOCKS

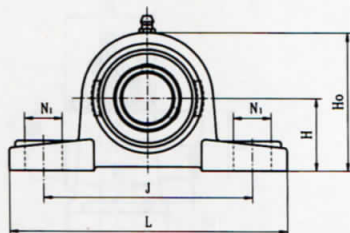

UCP Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	H	L	J	A	N	N ₁	H ₁	H ₀	S	B				
UCP 305-14 305-15 305 305-16	7/8 15/16 1	25	45	173	132	45	17	20	15	85	15	38	M14	UC 305-14 305-15 305 305-16	P305	1.4
UCP 306-18 306 306-19	1-1/8 1-3/16	30	50	180	140	50	17	20	15	95	17	43	M14	UC 306-18 306 306-19	P306	1.8
UCP 307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	56	210	160	56	17	25	19	106	19	48	M14	UC 307-20 307-21 307-22 307	P307	2.8
UCP 308-24 308-25 308	1-1/2 1-9/16	40	60	218	170	62	18	25	19	116	19	52	M14	UC 308-24 308-25 308	P308	3.0
UCP 309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	67	244	190	66	20	26	23	129	22	57	M16	UC 309-26 309-27 309-28 309	P309	4.1
UCP 310-30 310-31 310	1-7/8 1-15/16	50	75	271	212	74	20	30	26	143	22	61	M16	UC 310-30 310-31 310	P310	5.8
UCP 311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	80	300	236	80	20	32	29	154	25	66	M16	UC 311-32 311-34 311 311-35	P311	7.4
UCP 312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	85	325	250	85	23	35	31	164	26	71	M20	UC 312-36 312 312-38 312-39	P312	9.4
UCP 313-40 313	2-1/2	65	90	335	260	90	25	38	33	176	30	75	M20	UC 313-40 313	P313	10
UCP 314-44 314	2-3/4	70	95	360	280	93	27	40	34	187	31	78	M22	UC 314-44 314	P314	12
UCP 315 315-48	3	75	100	380	290	100	27	40	35	198	32	82	M22	UC 315 315-48	P315	14
UCP 316		80	106	400	300	105	27	40	37	210	34	86	M22	UC 316	P316	18
UCP 317-52 317	3-1/4	85	112	420	320	110	33	45	40	220	40	96	M27	UC 317-52 317	P317	20
UCP 318-56 318	3-1/2	90	118	430	330	110	33	45	40	234	40	96	M27	UC 318-56 318	P318	24
UCP 319 319-60	3-3/4	95	125	470	360	120	36	50	46	248	41	103	M30	UC 319 319-60	P319	29
UCP 320 320-64	4	100	140	490	380	120	36	50	50	275	42	108	M30	UC 320 320-64	P320	35
UCP 321		105	140	490	380	120	36	50	56	283	44	112	M18x1.5	UC 321	P321	35
UCP 322		110	150	520	400	140	40	55	61	303	46	117	M18x1.5	UC 322	P322	45
UCP 324		120	160	570	450	140	40	55	71	323	51	126	M18x1.5	UC 324	P324	55
UCP 326		130	180	600	480	140	40	55	81	363	54	135	M20x1.5	UC 326	P326	72
UCP 328		140	200	620	500	140	40	55	81	403	59	145	M20x1.5	UC 328	P328	89



PILLOW BLOCKS

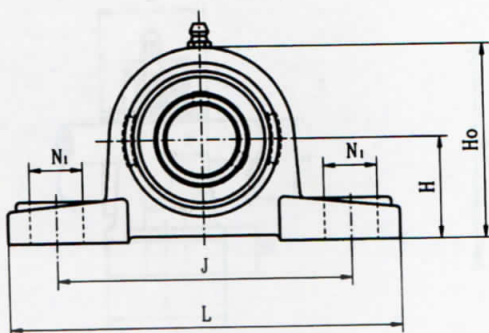

UCPX Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	H	L	J	A	N	N ₁	H ₁	H ₀	S	B				
UCP X05-14 X05-15 X05 X05-16	7/8 15/16 1	25	44.4	159	119	51	17	20	17	85	15.9	38.1	M14	UCX05-14 X05-15 X05 X05-16	PX 05	1.5
UCP X06-18 X06 X06-19 X06-20	1-1/8 1-3/16 1-1/4	30	47.6	175	127	54	17	20	20	93	17.5	42.9	M14	UCX06-18 X06 X06-19 X06-20	PX 06	2.1
UCP X07-22 X07 X07-23	1-3/8 1-7/16	35	54	203	144	57	17	20	21	105	19	49.2	M14	UCX07-22 X07 X07-23	PX 07	2.7
UCP X08-24 X08	1-1/2	40	58.7	222	156	65	20	23	23	112	19	49.2	M16	UCX08-24 X08	PX 08	3.5
UCP X09-26 X09-27 X09-28 X09	1-5/8 1-11/16 1-3/4	45	58.7	222	156	67	20	23	25	116	19	51.6	M16	UCX09-26 X09-27 X09-28 X09	PX 09	3.7
UCP X10-30 X10-31 X10 X10-32	1-7/8 1-15/16 2	50	63.5	240	171	71	20	23	24	126	22.2	55.6	M16	UCX10-30 X10-31 X10 X10-32	PX 10	4.6
UCP X11-34 X11 X11-35 X11-36	2-1/8 2-3/16 2-1/4	55	69.8	260	184	79	25	28	29	137	25.4	65.1	M20	UCX11-34 X11 X11-35 X11-36	PX 11	6.5
UCP X12 X12-38 X12-39	2-3/8 2-7/16	60	76.2	280	203	81	25	28	31	149	25.4	65.1	M20	UCX12 X12-38 X12-39	PX 12	7.7
UCP X13-40 X13	2-1/2	65	76.2	286	203	83	25	28	33	152	30.2	74.6	M20	UCX13-40 X13	PX 13	8.1
UCP X14-44 X14	2-3/4	70	88.9	320	229	85	27	30	34	170	33.3	77.8	M22	UCX14-44 X14	PX 14	10.2
UCP X15 X15-48	3	75	88.9	330	229	92	27	30	35	175	33.3	82.6	M22	UCX15 X15-48	PX 15	10.8
UCP X16		80	101.6	378	283	99	27	30	37	194	34.1	85.7	M22	UCX16	PX 16	15.3
UCP X17-52 X17	3-1/4	85	101.6	380	283	102	27	30	40	200	39.7	96	M22	UCX17-52 X17	PX 17	16.1
UCP X18-56 X18	3-1/2	90	101.6	381	283	106	27	30	40	206	42.9	104	M22	UCX18-56 X18	PX 18	19.1
UCP X20 X20-64	4	100	127	432	337	120	33	36	45	244	49.2	117.5	M27	UCX20 X20-64	PX 20	30.4


HIGH CENTER HEIGHT PILLOW BLOCKS

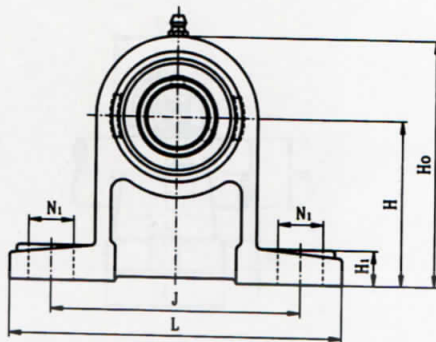

UCPH
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)											Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d		H	J	L	A	N	N ₁	H ₁	H ₀	S	B					
	(in.)	(mm)															
UCPH 202		15													UC 202		
202-10	5/8	17	70	95	127	38	12	16	13	97	11.5	27.4	M10		202-10	PH 203	0.78
203														203			0.80
203-11	11/16													203-11			
UCPH 204-12	3/4	20	70	95	127	40	12	16	13	101	12.7	31	M10		UC 204-12	PH 204	0.94
204														204			
UCPH 205-14	7/8	25	80	105	140	50	13	19	16	114	14.3	34.1	M10		UC 205-14	PH 205	1.20
205-15	15/16													205-15			
205														205			
205-16	1													205-16			
UCPH 206-18	1-1/8	30	90	121	165	50	17	21	18	130	15.9	38.1	M12		UC 206-18	PH 206	1.60
206														206			
206-19	1-3/16													206-19			
206-20	1-1/4													206-20			
UCPH 207-20	1-1/4	35	95	127	167	60	17	21	19	140	17.5	42.9	M12		UC 207-20	PH 207	2.10
207-21	1-5/16														207-21		
207-22	1-3/8														207-22		
207															207		
207-23	1-7/16														207-23		
UCPH 208-24	1-1/2	40	100	137	184	66	17	21	20	150	19	49.2	M12		UC 208-24	PH 208	2.70
208-25	1-9/16														208-25		
208															208		
UCPH 209-26	1-5/8	45	105	146	190	70	17	21	20	158	19	49.2	M12		UC 209-26	PH 209	3.10
209-27	1-11/16														209-27		
209-28	1-3/4														209-28		
209															209		
UCPH 210-30	1-7/8	50	110	159	204	70	19	22	22	165	19	51.6	M16		UC 210-30	PH 210	3.50
210-31	1-15/16														210-31		
210															210		
210-32	2														210-32		
UCPH 211-32	2	55	120	171	217	75	19	22	23	181	22.2	55.6	M16		UC 211-32	PH 211	4.07
211-34	2-1/8														211-34		
211															211		
211-35	2-3/16														211-35		
UCPH 212-36	2-1/4	60	130	186	236	80	19	22	24	197	25.4	65.1	M16		UC 212-36	PH 212	
212															212		
212-38	2-3/8														212-38		
212-39	2-7/16														212-39		
UCPH 213-40	2-1/2	65	140	203	258	85	23	28	26	213	25.4	65.1	M20		UC 213-40	PH 213	
213															213		
UCPH 214-44	2-3/4	70	150	210	266	90	23	28	27	227	30.2	74.6	M20		UC 214-44	PH 214	
214															214		
UCPH 215-47	2-15/16	75	160	217	274	95	23	28	28	240	33.3	77.8	M20		UC 215-47	PH 215	
215															215		
215-48	3														215-48		
UCPH 216		80	170	232	290	100	24	28	30	256	33.3	82.6	M20		UC 216	PH 216	



TAPPED-BASE PILLOW BLOCKS

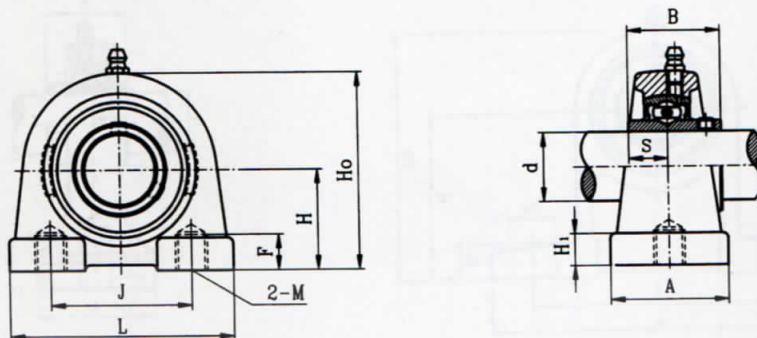

UCPA
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)										Bearing No.	Housing No.	Mass (kg)
	d		H	L	J	A	H ₀	H _i	S	B	F	M			
	(in.)	(mm)													
UCPA202		15											UC 202		
202-10	5/8		30.2	70	52	36	57	10	11.5	27.4	9	M8	202-10	PA 203	---
203		17											203		
203-11	11/16												203-11		
UCPA204-12	3/4	20	30.2	76	52	40	62	11	12.7	31	13	M10X1.5	UC 204-12	PA 204	0.6
204													204		
UCPA205-14	7/8												UC 205-14		
205-15	15/16		36.5	84	56	38	72	12	14.3	34.1	15	M10X1.5	205-15	PA 205	0.8
205		25											205		
205-16	1												205-16		
UCPA206-18	1-1/8	30											UC 206-18		
206			42.9	94	66	48	84	13	15.9	38.1	18	M14X2	206	PA 206	1.2
206-19	1-3/16												206-19		
206-20	1-1/4												206-20		
UCPA207-20	1-1/4												UC 207-20		
207-21	1-5/16												207-21		
207-22	1-3/8		47.6	110	80	48	95	13	17.5	42.9	20	M14X2	207-22	PA 207	1.7
207		35											207		
207-23	1-7/16												207-23		
UCPA208-24	1-1/12												UC 208-24		
208-25	1-9/16		49.2	116	84	54	100	13	19	49.2	20	M14X2	208-25	PA 208	2.0
208		40											208		
UCPA209-26	1-5/8												UC 209-26		
209-27	1-11/16		54.2	120	90	60	108	13	19	49.2	25	M14X2	209-27	PA 209	2.2
209-28	1-3/4												209-28		
209		45											209		
UCPA210-30	1-7/8												UC 210-30		
210-31	1-15/16												210-31	PA 210	2.8
210		50	57.2	130	94	60	116	14	19	51.6	25	M16X2	210		
210-32	2												210-32		
UCPA211-32	2												UC 211-32		
211-34	2-1/8		63.5	140	104	66	125	14	22.2	55.6	25	M16X2	211-34	PA 211	3.0
211		55											211		
211-35	2-3/16												211-35		
UCPA212-36	2-1/4												UC 212-36		
212		60	69.9	150	114	68	138	15	25.4	65.1	25	M16X2	212	PA 212	4.24
212-38	2-3/8												212-38		
212-39	2-7/16												212-39		
UCPA212-40	2-1/2												UC 212-40	PA 213	---
213		65	76.2	160	124	70	150	15	25.4	65.1	25	M16X2	213		



TAPPED-BASE PILLOW BLOCKS

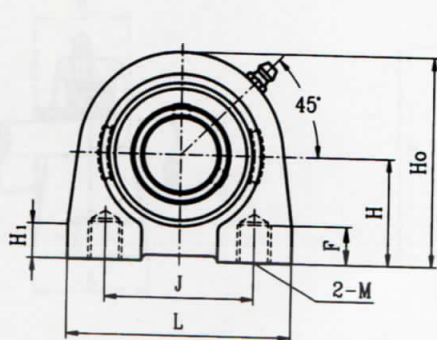

UCPA-A Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)										Bearing No.	Housing No.	Mass (kg)
	(in.)	(mm)	H	L	J	A	H ₀	H ₁	S	B	F	M			
UCPA204-12A 204A	3/4	20	33.3	73	50.8	38	65	12	12.7	31	13	3/8-16NC	UC204-12 204	PA204A	0.60
UCPA205-14A 205-15A 205A 205-16A	7/8 15/16 1	25	36.5	76.2	50.8	38	71.4	12	14.3	34.1	13	3/8-16NC	UC205-14 205-15 205 205-16	PA205A	0.8
UCPA206-18A 206A 206-19A 206-20A	1-1/8 1-3/16 1-1/4	30	42.9	101.6	76.2	38	85.7	15	15.9	38.1	16	7/16-16NC	UC206-18 206 206-19 206-20	PA206A	1.2
UCPA207-20A 207-21A 207-22A 207A 207-23A	1-1/4 1-5/16 1-3/8 1-7/16	35	47.6	108	82.5	47.6	95.2	16	17.5	42.9	19	1/2-13NC	UC207-20 207-21 207-22 207 207-23	PA207A	1.7
UCPA208-24A 208-25A 208A	1-1/2 1-9/16	40	49.2	117.5	88.9	47.6	100	16	19	49.2	19	1/2-13NC	UC208-24 208-25 208	PA208A	2.0
UCPA209-26A 209-27A 209-28A 209A	1-5/8 1-11/16 1-3/4	45	53.98	127	95.25	50.8	108	18	19	49.2	19	1/2-13NC	UC209-26 209-27 209-28 209	PA209A	2.2
UCPA210-30A 210-31A 210A 210-32A	1-7/8 1-15/16 2	50	57.15	139.7	101.6	50.8	117.5	18	19	51.6	25	5/8-11NC	UC210-30 210-31 210 210-32	PA210A	2.8

Technical drawing of a hemispherical shell. The drawing shows a cross-section of the shell, which is hemispherical in shape. The dimensions are labeled as follows: L is the total width of the base; J is the width of the base excluding the flange; H is the height of the base; H_0 is the total height of the shell; N is the thickness of the flange. A dashed line indicates the internal structure of the shell.





SAPP

Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d		H	J	L	A	N	H ₁	H ₀	S	B ₁					
	(in.)	(mm)														
SAPP 201		12												SA 201		
201-8	1/2													201-8		
202		15												202		
202-10	5/8		22.2	68	86	25	9.5	3	43.5	6.5	28.6	M8		202-10	PP203	0.20
203		17												203		
203-11	11/16													203-11		
SAPP 204-12	3/4		25.4	76	98	32	9.5	3	50.2	7	29.5	M8		SA 204-12	PP204	0.23
204		20												204		
SAPP 205-14	7/8													SA 205-14		
205-15	15/16													205-15		
205		25	28.6	86	108	32	11.5	4	56.4	7.5	30.5	M10		205	PP205	0.32
205-16	1													205-16		
SAPP 206-18	1-1/8													SA 206-18		
206		30												206		
206-19	1-3/16		33.3	95	117	38	11.5	4	66.1	8	33.9	M10		206-19	PP206	0.47
206-20	1-1/4													206-20		
SAPP 207-20	1-1/4													SA 207-20		
207-21	1-5/16													207-21		
207-22	1-3/8		39.7	106	129	42	11.5	4	77.7	9	37.5	M10		207-22	PP207	0.60
207		35												207		
207-23	1-7/16													207-23		



SQUARE FLANGE UNITS

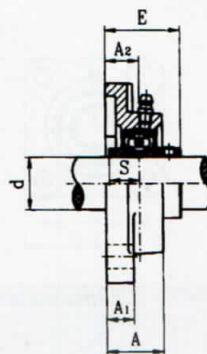

UCF
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size	Bearing No.	Housing No.	Mass (kg)	Available N
	d (in.)	d (mm)	L	J	A ₂	A ₁	A	E	N	S					
UCF202		15										UC202			
202-10	5/8											202-10		0.57	
203		17	76	54	15	11	25.5	30.9	11.5	11.5	M10	203	F203	0.50	—
203-11	11/16											203-11			
UCF204-12	3/4	20	86	64	15	11	25.5	33.3	11.5	12.7	M10	UC204-12	F204	0.61	12
204												204			
UCF205-14	7/8											UC205-14			
205-15	15/16											205-15	F205	0.80	12
205		25	95	70	16	13	27	35.8	11.5	14.3	M10	205			
205-16	1											205-16			
UCF206-18	1-1/8	30	108	83	18	13	31	40.2	11.5	15.9	M10	UC206-18	F206	1.07	12
206												206			
206-19	1-3/16											206-19			
206-20	1-1/4											206-20			
UCF207-20	1-1/4											UC207-20			
207-21	1-5/16											207-21	F207	1.40	—
207-22	1-3/8	35	117	92	19	15	34	44.4	14	17.5	M12	207-22			
207												207			
207-23	1-7/16											207-23			
UCF208-24	1-1/2	40	130	102	21	15	36	51.2	14	19	M12	UC208-24	F208	1.80	16
208-25	1-9/16											208-25			
208												208			
UCF209-26	1-5/8											UC209-26			
209-27	1-11/16											209-27	F209	2.20	—
209-28	1-3/4	45	137	105	22	16	38	52.2	16	19	M14	209-28			
209												209			
UCF210-30	1-7/8											UC210-30			
210-31	1-15/16	50	143	111	22	16	40	54.6	18	19	M16	210-31	F210	2.40	16
210												210			
UCF211-32	2											UC211-32			
211-34	2-1/8											211-34	F211	3.50	19
211		55	162	130	25	18	43	58.4	18	22.2	M16	211			
211-35	2-3/16											211-35			
UCF212-36	2-1/4	60	175	143	29	18	48	68.7	18	25.4	M16	UC212-36	F212	4.20	19
212												212			
212-38	2-3/8											212-38			
212-39	2-7/16											212-39			
UCF213-40	2-1/2	65	187	149	30	22	50	69.7	18	25.4	M16	UC213-40	F213	5.30	19
213												213			
UCF214-44	2-3/4	70	193	152	31	22	54	75.4	18	30.2	M16	UC214-44	F214	5.90	19
214												214			
UCF215-47	2-15/16	75	200	159	34	22	56	78.5	18	33.3	M16	UC215-47	F215	6.30	19
215												215			
215-48	3											215-48			
UCF216		80	208	165	34	22	57	83.3	22	33.3	M20	UC216	F216	7.30	23
UCF217-52	3-1/4	85	220	175	36	24	63	87.6	23	34.1	M20	UC217-52	F217	8.90	
217												217			
UCF218-56	3-1/2	90	235	187	40	25	68	96.3	23	39.7	M20	UC218-56	F218	11.60	
218												218			

SQUARE FLANGE UNITS





UCF

Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size	Bearing No.	Housing No.	Mass (kg)
	(in.)	(mm)	L	J	A ₂	A ₁	A	E	N	S				
UCF 305-14 305-15 305 305-16	7/8 15/16 1	25	108	80	16	13	29	39	16	15	M 14	UC 305-14 305-15 305 305-16	F305	1.2
UCF 306-18 306 306-19	1-1/8 1-3/16	30	125	95	18	15	32	44	16	17	M 14	UC 306-18 306 306-19	F306	1.8
UCF 307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	135	100	20	16	36	49	19	19	M 16	UC 307-20 307-21 307-22 307	F307	2.2
UCF 308-24 308-25 308	1-1/2 1-9/16	40	150	112	23	17	40	56	19	19	M 16	UC 308-24 308-25 308	F308	2.9
UCF 309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	160	125	25	18	44	60	19	22	M 16	UC 309-26 309-27 309-28 309	F309	3.5
UCF 310-30 310-31 310	1-7/8 1-15/16	50	175	132	28	20	48	67	23	22	M 20	UC 310-30 310-31 310	F310	4.8
UCF 311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	185	140	30	20	52	71	23	25	M 20	UC 311-32 311-34 311 311-35	F311	5.6
UCF 312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	193	150	33	22	56	78	23	26	M 20	UC 312-36 312 312-38 312-39	F312	6.7
UCF 313-40 313	2-1/2	65	208	166	33	22	58	78	23	30	M 20	UC 313-40 313	F313	7.8
UCF 314-44 314	2-3/4	70	226	178	36	25	61	81	25	33	M 22	UC 314-44 314	F314	10.1
UCF 315 315-48	3	75	236	184	39	25	66	89	25	32	M 22	UC 315 315-48	F315	11.1
UCF 316		80	250	196	38	27	68	90	31	34	M 27	UC 316	F316	12.8
UCF 317-52 317	3-1/4	85	260	204	44	27	74	100	31	40	M 27	UC 317-52 317	F317	15.4
UCF 318-56 318	3-1/2	90	280	216	44	30	76	100	35	40	M 30	UC 318-56 318	F318	19.0
UCF 319 319-60	3-3/4	95	290	228	59	30	94	121	35	41	M 30	UC 319 319-60	F319	20.6
UCF 320 320-64	4	100	310	242	59	32	94	125	38	42	M 33	UC 320 320-64	F320	25.7
UCF 321		105	310	242	59	32	94	127	38	44	M 33	UC 321	F321	
UCF 322		110	340	266	60	35	96	131	41	46	M 36	UC 322	F322	
UCF 324		120	370	290	65	40	110	140	41	51	M 36	UC 324	F324	
UCF 326		130	410	320	65	45	115	146	41	54	M 36	UC 326	F326	
UCF 328		140	450	350	75	55	125	161	41	59	M 36	UC 328	F328	



SQUARE FLANGE UNITS

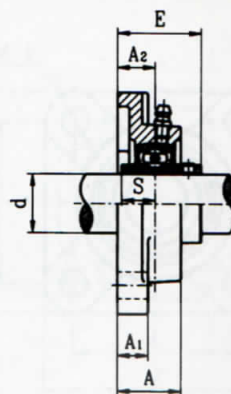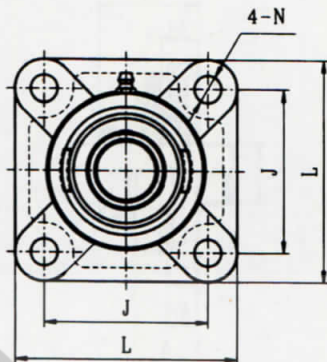

UCFX Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size	Bearing No.	Housing No.	Mass (kg)
	(in.)	(mm)	L	J	A ₂	A ₁	A	E	N	S				
UCFX05-14 X05-15 X05 X05-16	7/8 15/16 1	25	108	82.5	18	13	30	40.2	11.5	15.9	M10	UC X05-14 X05-15 X05 X05-16	FX05	1.2
UCFX06-18 X06 X06-19 X06-20	1-1/8 1-3/16 1-1/4	30	117	92	19	14	34	44.4	13	17.5	M12	UC X06-18 X06 X06-19 X06-20	FX06	1.6
UCFX07-22 X07 X07-23	1-3/8 1-7/16	35	130	101.5	21	14	38	51.2	13	19	M12	UC X07-22 X07 X07-23	FX07	2.0
UCFX08-24 X08-25 X08	1-1/2 1-9/16	40	137	105	22	14	40	52.2	15	19	M14	UC X08-24 X08-25 X08	FX08	2.4
UCFX09-26 X09-27 X09-28 X09	1-5/8 1-11/16 1-3/4	45	143	111	23	14	40	55.6	15	19	M14	UC X09-26 X09-27 X09-28 X09	FX09	2.7
UCFX10-30 X10-31 X10 X10-32	1-7/8 1-15/16 2	50	162	130	26	20	44	59.4	17	22.2	M16	UC X10-30 X10-31 X10 X10-32	FX10	3.7
UCFX11-34 X11 X11-35 X11-36	2-1/8 2-3/16 2-1/4	55	175	143	29	20	49	68.7	17	25.4	M16	UC X11-34 X11 X11-35 X11-36	FX11	4.9
UCFX12 X12-38 X12-39	2-3/8 2-7/16	60	187	149	34	21	57	73.7	17	25.4	M16	UC X12 X12-38 X12-39	FX12	5.7
UCFX13-40 X13	2-1/2	65	187	149	34	21	59	78.4	17	30.2	M16	UC X13-40 X13	FX13	6.3
UCFX14-44 X14	2-3/4	70	197	152	37	24	60	81.5	20	33.3	M18	UC X14-44 X14	FX14	7.0
UCFX15 X15-48	3	75	197	152	40	24	68	89.3	20	33.3	M18	UC X15 X15-48	FX15	8.4
UCFX16		80	214	171	40	24	70	91.6	20	34.1	M18	UC X16	FX16	9.4
UCFX17-52 X17	3-1/4	85	214	171	40	24	70	96.3	20	39.7	M18	UC X17-52 X17	FX17	10.8
UCFX18-56 X18	3-1/2	90	214	171	45	24	76	106.1	23	42.9	M20	UC X18-56 X18	FX18	11.9
UCFX20 X20-64	4	100	268	211	59	31	97	127.3	31	49.2	M27	UCX20 X20-64	FX20	19.4

SQUARE FLANGE UNITS

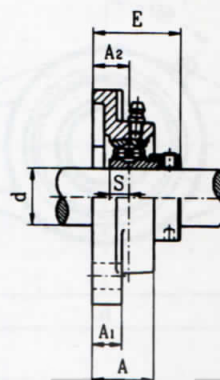
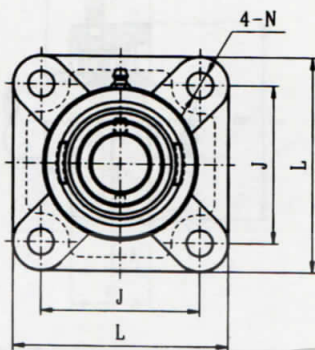


SAF-G

Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size	Bearing No.	Housing No.	Mass (kg)	Available N
	d (in.)	d (mm)	L	J	A ₂	A ₁	A	E	N	S					
SAF201G		12										SA201G		0.43	
201-8G	1/2											201-8G		0.43	
202G		15										202G		0.42	
202-10G	5/8		76	54	15	11	25.5	37.1	11.5	6.5	M10	202-10G	F203	0.42	--
SAF203G		17										SA203G		0.42	
203-11G	11/16											203-11G		0.42	
SAF204-12G	3/4											SA204-12G		0.55	
204G		20	86	64	15	11	25.5	37.5	11.5	7	M10	204G	F204	0.58	12
SAF205-14G	7/8											SA205-14G		0.74	
205-15G	15/16											205-15G		0.73	
205G		25	95	70	16	13	27	39	11.5	7.5	M10	205G	F205	0.71	12
205-16G	1											205-16G		0.70	
SAF206-18G	1-1/8											SA206-18G		1.08	
206G		30	108	83	18	13	31	43.9	11.5	8	M10	206G		1.06	
206-19G	1-3/16											206-19G	F206	1.04	12
206-20G	1-1/4											206-20G		1.01	
SAF207-20G	1-1/4											SA207-20G		1.46	
207-21G	1-5/16											207-21G		1.43	
207-22G	1-3/8		117	92	19	15	34	47.5	14	9	M12	207-22G	F207	1.41	--
207G		35										207G		1.40	
207-23G	1-7/16											207-23G		1.38	
SAF208-24G	1-1/2											SA208-24G		1.80	
208-25G	1-9/16		130	102	21	15	36	52	14	9.5	M12	208-25G		1.79	
208G		40										208G	F208	1.77	16
SAF209-26G	1-5/8											SA209-26G		2.20	
209-27G	1-11/16											209-27G		2.14	
209-28G	1-3/4		137	105	22	16	38	54.2	16	10	M14	209-28G	F209	2.11	--
209G		45										209G		2.07	
SAF210-30G	1-7/8											SA210-30G		2.45	
210-31G	1-15/16		143	111	22	16	40	55.2	18	10.5	M16	210-31G		2.43	
210G		50										210G	F210	2.40	16
SAF211-32G	2											SA211-32G		3.18	
211-34G	2-1/8											211-34G		2.96	
211G		55	162	130	25	18	43	61.9	18	11.5	M16	211G	F211	2.87	19
211-35G	2-3/16											211-35G		2.81	



OVAL FLANGE UNITS

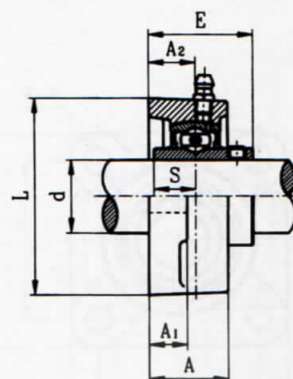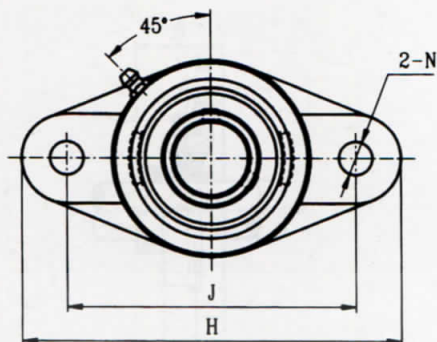

UCFL
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)									Bolt Size	Bearing No.	Housing No.	Mass (kg)	Available N
	(in.)	(mm)	H	J	L	A ₂	A ₁	A	E	N	S					
UCFL202		15											UC202			
202-10	5/8												202-10	FL203	0.45	—
UCFL203		17											UC203		0.43	
203-11	11/16												203-11			
UCFL204-12	3/4												UC204-12	FL204	0.48	12
204		20											204			
UCFL205-14	7/8												UC205-14			
205-15	15/16												205-15	FL205	0.6	16
205		25											205			
205-16	1												205-16			
UCFL206-18	1-1/8												UC206-18			
206		30											206	FL206	0.9	16
206-19	1-3/16												206-19			
206-20	1-1/4												206-20			
UCFL207-20	1-1/4												UC207-20			
207-21	1-5/16												207-21	FL207	1.2	16
207		35											207			
207-23	1-7/16												207-23			
UCFL208-24	1-1/2												UC208-24			
208-25	1-9/16												208-25	FL208	1.5	16
208		40											208			
UCFL209-26	1-5/8												UC209-26			
209-27	1-11/16												209-27	FL209	1.9	19
209-28	1-3/4												209-28			
209		45											209			
UCFL210-30	1-7/8												UC210-30			
210-31	1-15/16												210-31	FL210	2.2	19
210		50											210			
210-32	2												210-32			
UCFL211-32	2												UC211-32			
211-34	2-1/8												211-34	FL211	3.1	19
211		55											211			
211-35	2-3/16												211-35			
UCFL212-36	2-1/4												UC212-36			
212		60											212	FL212	4.0	23
212-38	2-3/8												212-38			
212-39	3-7/16												212-39			
UCFL213-40	2-1/2												UC213-40	FL213	5.0	—
213		65											213			
UCFL214-44	2-3/4												UC214-44	FL214	5.6	—
214		70											214			
UCFL215-47	2-15/16												UC215-47			
215		75											215	FL215	6.2	—
215-48	3												215-48			
UCFL216		80											UC216	FL216	7.8	—
UCFL217-52	3-1/4												UC217-52			
217		85											217	FL217	9.8	—
UCFL218-56	3-1/2												UC218-56			
218		90											218	FL218	12.4	—

OVAL FLANGE UNITS

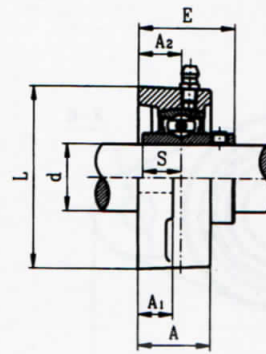
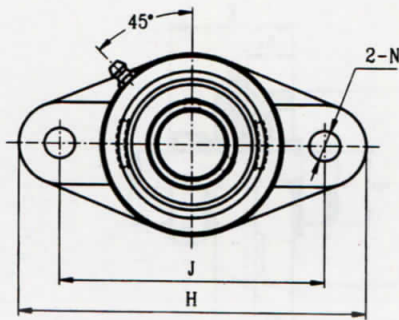


UCFL

Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d		H	J	L	A ₂	A ₁	A	E	N	S					
	(in.)	(mm)														
UCFL305-14 305-15 305 305-16	7/8 15/16 1	25	150	113	80	16	13	29	39	19	15	M16	UC 305-14 305-15 305 305-16	FL305	1.1	
UCFL306-18 306 306-19	1-1/8 1-3/16	30	180	134	90	18	15	32	44	23	17	M20	UC 306-18 306 306-19	FL306	1.5	
UCFL307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	185	141	100	20	16	36	49	23	19	M20	UC 307-20 307-21 307-22 307	FL307	1.8	
UCFL308-24 308-25 308	1-1/2 1-9/16	40	200	158	112	23	17	40	56	23	19	M20	UC 308-24 308-25 308	FL308	2.5	
UCFL309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	230	177	125	25	18	44	60	25	22	M22	UC 309-26 309-27 309-28 309	FL309	3.4	
UCFL310-30 310-31 310	1-7/8 1-15/16	50	240	187	140	28	19	48	67	25	22	M22	UC 310-30 310-31 310	FL310	4.4	
UCFL311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	250	198	150	30	20	52	71	25	25	M22	UC 311-32 311-34 311 311-35	FL311	5.1	
UCFL312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	270	212	160	33	22	56	78	31	26	M27	UC 312-36 312 312-38 312-39	FL312	6.1	
UCFL313-40 313	2-1/2	65	295	240	175	33	25	58	78	31	30	M27	UC 313-40 313	FL313	7.8	
UCFL314-44 314	2-3/4	70	315	250	185	36	28	61	83	35	31	M30	UC 314-44 314	FL314	9.8	
UCFL315 315-48	3	75	320	260	195	39	30	66	89	35	32	M30	UC 315 315-48	FL315	11.3	
UCFL316		80	355	285	210	38	32	68	90	38	34	M33	UC 316	FL316	14.3	
UCFL317-52 317	3-1/4	85	370	300	220	44	32	74	100	38	40	M33	UC 317-52 317	FL317	16.0	
UCFL318-56 318	3-1/2	90	385	315	235	44	36	76	100	38	40	M33	UC 318-56 318	FL318	19.1	
UCFL319 319-60	3-3/4	95	405	330	250	59	40	94	121	41	41	M36	UC 319 319-60	FL319	24.6	
UCFL320 320-64	4	100	440	360	270	59	40	94	125	44	42	M39	UC 320 320-64	FL 320	30.8	
UCFL321		105	444	360	270	59	40	94	127	44	44	M39	UC 321	FL 321	27	
UCFL322		110	474	390	300	60	42	96	131	44	46	M39	UC 322	FL 322	33	
UCFL324		120	524	430	330	65	48	110	140	47	51	M42	UC 324	FL 324	48	
UCFL326		130	554	460	360	65	50	115	146	47	54	M42	UC 326	FL 326	58	
UCFL328		140	604	500	400	75	60	125	161	51	59	M45	UC 328	FL 328	81	

OVAL FLANGE UNITS

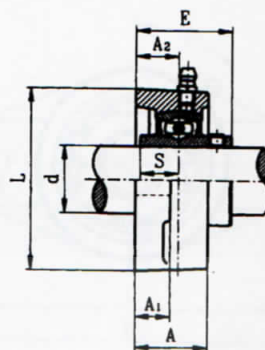
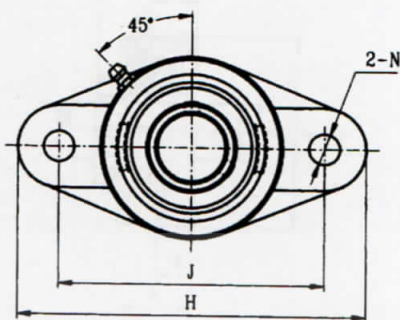


UCFT

Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	Da	H	J	L	A ₁	A ₂	A	E	N	S				
UCFT201		12	40	112	76.2	60	11	17.1	24.6	33	10.5		M10	UC201	FT201	0.39
UCFT202		15	40	112	76.2	60	11	17.1	24.6	33	10.5	11.5	M10	UC202	FT202	0.40
UCFT203		17	40	112	76.2	60	11	17.1	24.6	33	10.5	11.5	M10	UC203	FT203	0.39
UCFT204		20	47	112	89.7	60	11	14.3	24.6	32.6	10.5	12.7	M10	UC204	FT204	0.49
UCFT205		25	52	124	98.8	70	13	15.9	27	35.7	12.5	14.3	M10	UC205	FT205	0.68
UCFT206		30	62	141	116.7	83	13	17.9	30	40.1	12.5	15.9	M12	UC206	FT206	0.87
UCFT207		35	72	156	130.2	95	14	19.1	34	44.5	14	17.5	M12	UC207	FT207	1.32
UCFT208		40	80	171	143.7	105	14	21	38	51.2	14	19	M12	UC208	FT208	1.54
UCFT209		45	85	179	148.4	111	14	21.8	40	52	16	19	M12	UC209	FT209	1.73
UCFT210		50	90	189	157.2	116	14	22.2	40	54.8	16	19	M16	UC210	FT210	2.30
UCFT211		55	100	216	184.2	133	21	25.4	44	58.8	18	22.2	M16	UC211	FT211	2.77



OVAL FLANGE UNITS

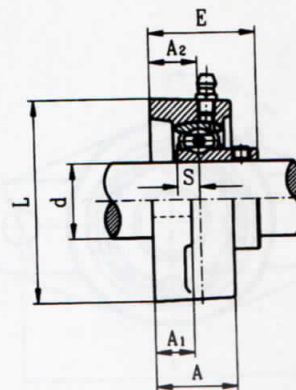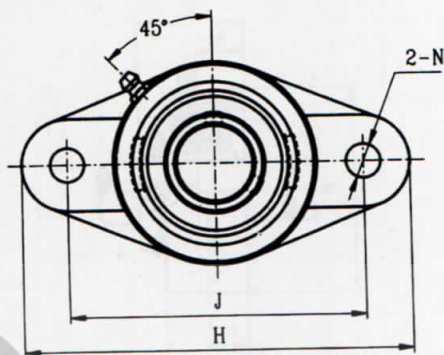

SBFL-G
Set screw type


Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)	Available N
	d (in.)	d (mm)	H	J	L	A ₂	A ₁	A	E	N	S						
SBFL202G 202-10G 203G 203-11G	5/8 11/16	15 17	99	76.5	57	15	11	25.5	31	11.5	6	M10	SB 202G 202-10G 203G 203-11G	FL203	0.36 0.38	—	
SBFL204-12G 204G	3/4	20	113	90	60	15	11	25.5	33	11.5	7	M10	SB 204-12G 204G	FL204	0.39 0.37	12	
SBFL205-14G 205-15G 205G 205-16G	7/8 15/16 1	25	130	99	68	16	13	27	35.5	11.5	7.5	M10	SB 205-14G 205-15G 205G 205-16G	FL205	0.58 0.58 0.57 0.56	16	
SBFL206-18G 206G 206-19G 206-20G	1-1/8 1-3/16 1-1/4	30	148	117	80	18	13	31	39	11.5	8	M10	SB 206-18G 206G 206-19G 206-20G	FL206	0.84 0.83 0.82 0.81	16	
SBFL207-20G 207-21G 207-22G 207G 207-23G	1-1/4 1-5/16 1-3/8 1-7/16	35	161	130	90	19	14	34	42	14	9	M12	SB 207-20G 207-21G 207-22G 207G 207-23G	FL207	1.36 1.35 1.06 1.03 1.02	16	
SBFL208-24G 208-25G 208G	1-1/2 1-9/16	40	175	144	100	21	14	36	45.5	14	9.5	M12	SB 208-24G 208-25G 208G	FL208	1.40 1.38 1.30	16	

LIGHT-DUTY OVAL FLANGE UNITS(LFTC TYPE)

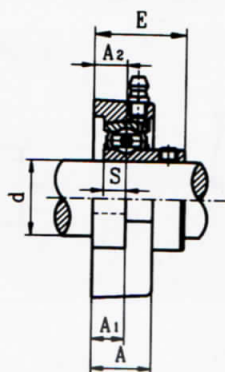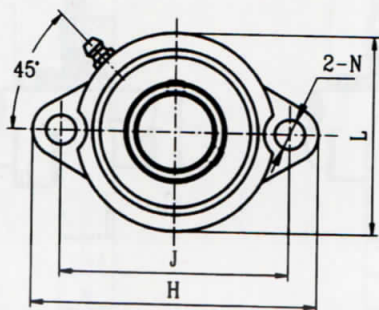

SBLF-G

Set screw type

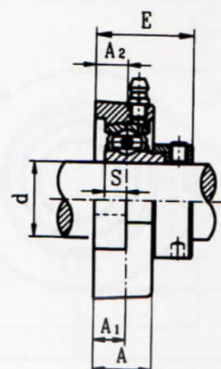

SALF-G




Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)									Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d		H	J	L	A ₁	A	A ₂	N	S	E					
	(in.)	(mm)														
SBLF 201G		12												SB201G		
201-8G	1/2													201-8G		0.27
202G		15												202G		
202-10G	5/8		81	63.5	56	9.5	18	9.5	8	6	25.5	M6	1/4	202-10G	LF203	0.26
203G		17												203G		0.25
203-11G	11/16													203-11G		
SBLF 204-12G	3/4													SB204-12G		
204G		20	90	71.5	61	11	20	11	10	7	29	M8	5/16	204G	LF204	0.33
SBLF 205-14G	7/8													SB205-14G		
205-15G	15/16													205-15G		
205G		25	95	76	64	11	20	11	10	7.5	30.5	M8	5/16	205G	LF205	0.38
205-16G	1													205-16G		
SBLF 206-18G	1-1/8													SB206-18G		
206G		30												206G		
206-19G	1-3/16		113	90.5	76	12	22.5	12	12	8	34	M10	3/8	206-19G	LF206	0.56
206-20G	1-1/4													206-20G		
SBLF 207-20G	1-1/4													SB207-20G		
207-21G	1-5/16													207-21G		
207-22G	1-3/8		122	100	89	13	24	13	12	9	36.5	M10	3/8	207-22G	LF207	0.80
207G		35												207G		
207-23G	1-7/16													207-23G		

Unit No.	Shaft Dia.		Dimensions(mm)									Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d		H	J	L	A ₁	A	A ₂	N	S	E					
	(in.)	(mm)														
SALF201G	1/2 5/8 11/16	12												SA201G	LF203	0.3
201-8G		15											201-8G			
202G		81	63.5	56	9.5	18	9.5	8	6.5	32	M6	1/4	202G	0.29		
202-10G		17											202-10G	0.28		
203G	3/4													203G	LF204	
203-11G		20	90	71.5	61	11	20	11	10	7	33.5	M8	5/16	SA204-12G		0.33
204G													204G			
SALF205-14G	7/8	25												SA 205-14G	LF205	
205-15G	15/16		95	76	64	11	20	11	10	7.5	34	M8	5/16	205-15G		0.42
205G														205G		
205-16G	1													205-16G		
SALF206-18G	1-1/8	30												SA206-18G	LF206	
206G			113	90.5	76	12	22.5	12	12	8	37.9	M10	3/8	206G		0.6
206-19G	1-3/16													206-19G		
206-20G	1-1/4													206-20G		
SALF207-20G	1-1/4	35												SA207-20G	LF207	
207-21G	1-5/16		122	100	89	13	24	13	12	9	41	M10	3/8	207-21G		0.85
207-22G	1-3/8													207-22G		
207G														207G		
207-23G	1-7/16													207-23G		

Notes: These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "G"

PRESSED-STEEL OVAL FLANGE UNITS

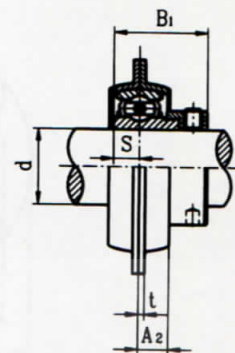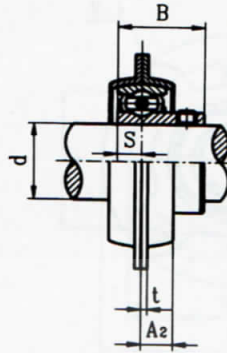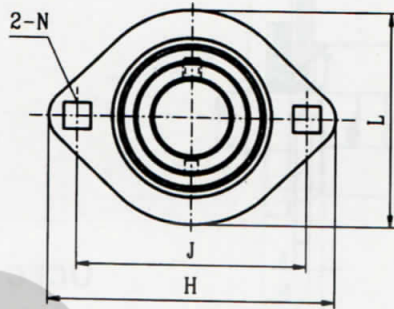



SBPFL
Set screw type

SAPFL
Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	H	J	A ₂	L	N	t	S	B					
SBPFL 201 201-8 202 202-10 203 203-11	1/2 5/8 11/16	12 15 17	81	63.5	7	59	7.5	2	6	22	M6	1/4	SB 201 201-8 202 202-10 203 203-11	PFL203	0.2
SBPFL 204-12 204	3/4	20	90	71.5	8	67	9	2	7	25	M8	5/16	SB 204-12 204	PFL204	0.24
SBPFL 205-14 205-15 205 205-16	7/8 15/16 1	25	95	76	9	71	9	2	7.5	27	M8	5/16	SB 205-14 205-15 205 205-16	PFL205	0.38
SBPFL 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	113	90.5	9	84	10.5	2.5	8	29	M10	3/8	SB 206-18 206 206-19 206-20	PFL206	0.38
SBPFL 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	122	100	10	94	10.5	2.5	9	32	M10	3/8	SB 207-20 207-21 207-22 207 207-23	PFL207	0.64

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	H	J	A ₂	L	N	t	S	B ₁					
SAPFL 201 201-8 202 202-10 203 203-11	1/2 5/8 11/16	12 15 17	81	63.5	7	59	7.5	2	6.5	28.6	M6	1/4	SA 201 201-8 202 202-10 203 203-11	PFL203	0.22
SAPFL 204-12 204	3/4	20	90	71.5	8	67	9	2	7	29.5	M8	5/16	SA 204-12 204	PFL204	0.225
SAPFL 205-14 205-15 205 205-16	7/8 15/16 1	25	95	76	9	71	9	2	7.5	30.5	M8	5/16	SA 205-14 205-15 205 205-16	PFL205	0.32
SAPFL 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	113	90.5	9	84	10.5	2.5	8	33.9	M10	3/8	SA 206-18 206 206-19 206-20	PFL206	0.41
SAPFL 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	122	100	10	94	10.5	2.5	9	37.5	M10	3/8	SA 207-20 207-21 207-22 207 207-23	PFL207	0.69

ROUND FLANGED CARTRIDGE UNITS

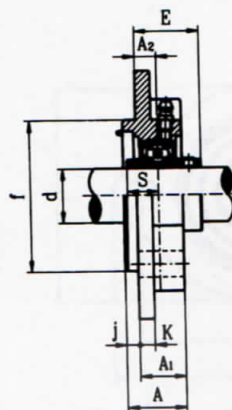
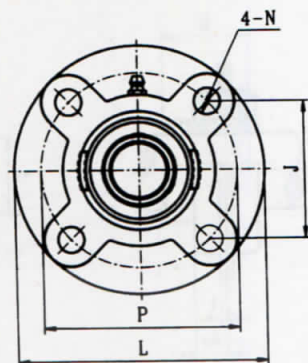


UCFC

Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)												Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	L	P	A ₂	A ₁	A	j	K	N	J	f	S	E				
UCFC 202 202-10 203 203-11	5/8 11/16	15 17	90	70	10	19	23	4	5	10	49.5	55	11.5	25.9	M8	UC 202 202-10 203 203-11	FC203	0.56 0.54
UCFC 204-12 204	3/4	20	100	78	10	20.5	25.5	5	6	11.5	55.1	62	12.7	28.3	M10	UC 204-12 204	FC204	0.76
UCFC 205-14 205-15 205 205-16	7/8 15/16 1	25	115	90	10	21	27	6	7	12	63.6	70	14.3	29.8	M10	UC 205-14 205-15 205 205-16	FC205	0.96
UCFC 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	125	100	10	23	31	8	8	12	70.7	80	15.9	32.2	M10	UC 206-18 206 206-19 206-20	FC206	1.37
UCFC 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	135	110	11	26	34	8	9	14	77.8	90	17.5	36.4	M12	UC 207-20 207-21 207-22 207 207-23	FC207	1.7
UCFC 208-24 208-25 208	1-1/2 1-9/16	40	145	120	11	26	36	10	9	14	84.8	100	19	41.2	M12	UC 208-24 208-25 208	FC208	2.0
UCFC 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	160	132	10	26	38	12	10	16	93.3	105	19	40.2	M14	UC 209-26 209-27 209-28 209	FC209	2.7
UCFC 210-30 210-31 210	1-7/8 1-15/16	50	165	138	10	28	40	12	14	16	97.6	110	19	42.6	M14	UC 210-30 210-31 210	FC210	2.9
UCFC 211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	185	150	13	30	42	12	13	19	106.1	125	22.2	46.4	M16	UC 211-32 211-34 211 211-35	FC211	4.2
UCFC 212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	195	160	17	36	48	12	15	19	113.1	135	25.4	56.7	M16	UC 212-36 212 212-38 212-39	FC212	4.94
UCFC 213-40 213	2-1/2	65	205	170	16	35	49	14	15	19	120.2	145	25.4	55.7	M16	UC 213-40 213	FC213	5.7
UCFC 214-44 214	2-3/4	70	215	177	17	38	52	14	16	19	125.1	150	30.2	61.4	M16	UC 214-44 214	FC214	6.8
UCFC 215 215-48	3	75	220	184	18	39	55	16	17	19	130.1	160	33.3	62.5	M16	UC 215 215-48	FC215	7.2
UCFC 216		80	240	200	18	42	58	16	18	23	141.4	170	33.3	67.3	M20	UC 216	FC216	8.7
UCFC 217-52 217	3-1/4	85	250	208	18	45	63	18	20	23	147.1	180	34.1	69.6	M20	UC 217-52 217	FC217	10.3
UCFC 218-56 218	3-1/2	90	265	220	22	50	68	18	20	23	155.5	190	39.7	78.3	M20	UC 218-56 218	FC218	13.5


TAKE-UP UNITS

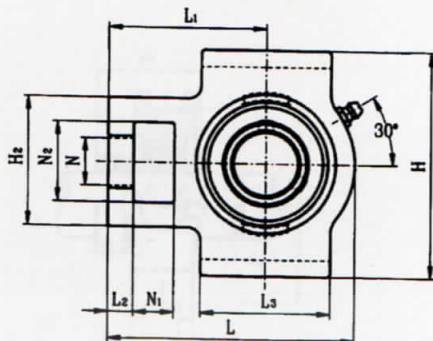

UCT
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)															Bearing No.	Housing No.	Mass (kg)
	d (in.)	d (mm)	N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B	S			
UCT204-12 204	3/4	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	UC 204-12 204	T204	0.79
UCT205-14 205-15 205	7/8 15/16	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34.1	14.3	UC 205-14 205-15 205	T205	0.88
UCT205-16 205-16	1																	UC 205-16 205-16		
UCT206-18 206	1-1/8	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	15.9	UC 206-18 206	T206	1.3
206-19 206-20	1-3/16 1-1/4																	206-19 206-20		
UCT207-20 207-21 207-22 207	1-1/4 1-5/16 1-3/8	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	17.5	UC 207-20 207-21 207-22 207	T207	1.7
207-23	1-7/16																	207-23		
UCT208-24 208-25 208	1-1/2 1-9/16	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49.2	19	UC 208-24 208-25 208	T208	2.5
UCT209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19.0	UC 209-26 209-27 209-28 209	T209	2.5
UCT210-30 210-31 210	1-7/8 1-15/16	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51.6	19	UC 210-30 210-31 210	T210	2.6
UCT211-32 211-34 211	2 2-1/8	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55.6	22.2	UC 211-32 211-34 211	T211	4.0
211-35	2-3/16																	211-35		
UCT212-36 212	2-1/4	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65.1	25.4	UC 212-36 212	T212	4.9
212-38 212-39	2-3/8 2-7/16																	212-38 212-39		
UCT213-40 213	2-1/2	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65.1	25.4	UC 213-40 213	T213	7.0
UCT214-44 214	2-3/4	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74.6	30.2	UC 214-44 214	T214	7.1
UCT215 215-48	3	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	33.3	UC 215 215-48	T215	7.5
UCT216		80	32	21	111	70	41	121	26	165	184	235	70	51	140	82.6	33.3	UC 216	T216	8.2
UCT217-52 217	3-1/4	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1	UC 217-52 217	T217	11.0

FLANGE BRACKET UNITS


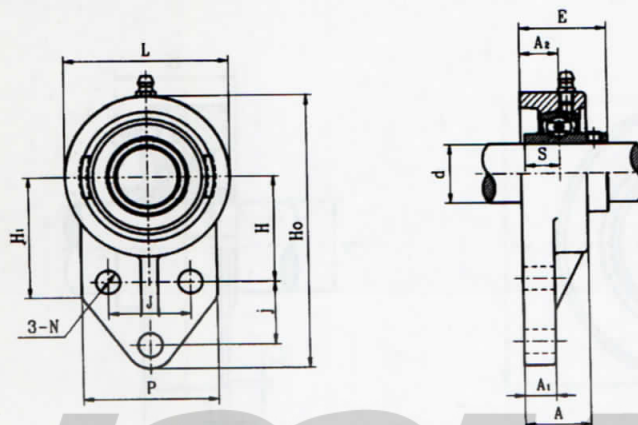


UCFB
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)													Bolt Size	Bearing No.	Housing No.	Mass (kg)
	d		H ₀	L	H ₁	P	H	J	J	A	A ₁	A ₂	N	E	S				
	(in.)	(mm)																	
UCFB202		15															UC202		
202-10	5/8																202-10		0.42
203		17	104	55	50	49	40	27	30	23.5	10	14	10	29.9	11.5	M8	203	FB203	0.41
203-11	11/16																203-11		
UCFB204-12	3/4																UC204-12		
204		20	109	60	52	52	42	27	32	25.5	11	15	10	33.3	12.7	M8	204	FB204	0.62
UCFB205-14	7/8																UC205-14		
205-15	15/16																205-15		0.69
205		25	116	68	52	56	45	27	34	27	13	16	10	35.8	14.3	M8	205	FB205	
205-16	1																205-16		
UCFB206-18	1-1/8																UC206-18		
206		30	132	80	55	65	50	29	40	31	13	18	10	40.2	15.9	M8	206	FB206	0.93
206-19	1-3/16																206-19		
206-20	1-1/4																206-20		
UCFB207-20	1-1/4																UC207-20		
207-21	1-5/16																207-21		1.3
207-22	1-3/8		144	90	62	70	55	32	46	33	14	19	10	44.4	17.5	M8	207-22	FB207	
207		35															207		
207-23	1-7/16																207-23		
UCFB208-24	1-1/2																UC208-24		
208-25	1-9/16		164	100	72	78	60	41	50	35	17	21	12	51.2	19	M10	208-25	FB208	1.8
208		40															208		
UCFB209-26	1-5/8																UC209-26		
209-27	1-11/16																209-27		2.0
209-28	1-3/4		175	108	76	80	65	43	54	38	16	22	12	52.2	19	M10	209-28	FB209	
209		45															209		
UCFB210-30	1-7/8																UC210-30		
210-31	1-15/16																210-31		2.3
210		50	184	114	82	86	68	46	58	39	16	22	12	54.6	19	M10	210	FB210	
210-32	2																210-32		
UCFB211-32	2																UC211-32		
211-34	2-1/8																211-34		
211		55	207	128	86	90	78	50	62	42.5	18	25	14	58.4	22.2	M12	211	FB211	
211-35	2-3/16																211-35		
UCFB212-36	2-1/4																UC212-36		
212		60	224	140	90	94	84	55	66	47.5	19	29	14	68.7	25.4	M12	212	FB212	
212-38	2-3/8																212-38		
212-39	2-7/16																212-39		
UCFB213-40	2-1/2																UC213-40		
213		65	244	152	95	102	92	60	70	49	20	30	14	69.7	25.4	M12	213	FB213	

Unit No.	Shaft Dia.		Dimensions(mm)										Bolt Size	Bearing No.	Housing No.	Mass (kg)				
	d		H	J	L	P	A ₁	A ₂	A	N	E	S								
	(In.)	(mm)																		
UCFA 202	5/8	15	95	75	57	47	9	13	22	10	28.9	11.5	M8	UC 202	FA 203	0.37 0.36				
202-10		17												202-10						
203														203						
203-11	11/16													203-11						
UCFA 204-12	3/4		98	78	59	50	11	13.74	24	10	32.04	12.7	M8	UC 204-12	FA 204	0.45				
204		20												204						
UCFA 205-14	7/8	25	122	96	70	64	13	16	27	12	35.8	14.3	M8	UC 205-14	FA 205	0.69				
205-15	15/16													205-15						
205														205						
205-16	1													205-16						
UCFA 206-18	1-1/8	30	141	115	80	68	14	18	30.5	12	40.2	15.9	M8	UC 206-18	FA 206	1.0				
206														206						
206-19	1-3/16													206-19						
206-20	1-1/4													206-20						
UCFA 207-20	1-1/4	35	155	128	92	75	15	19	33	13	44.4	17.5	M8	UC 207-20	FA 207	1.5				
207-21	1-5/16													207-21						
207-22	1-3/8													207-22						
207														207						
207-23	1-7/16													207-23						
UCFA 208-24	1-1/2	40																		

HANGER UNITS

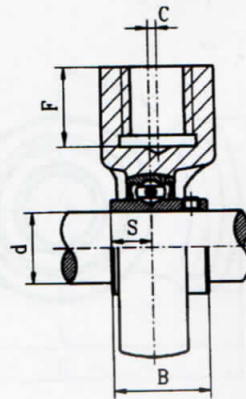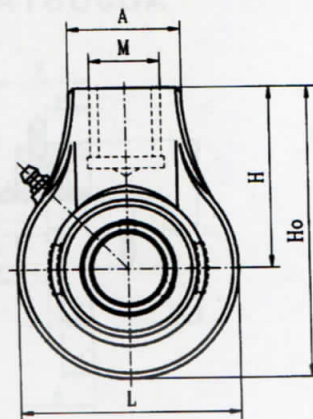




UCHA
Set screw type

Unit No.	Shaft Dia.		Dimensions(mm)									Bearing No.	Housing No.	Mass (kg)
	d		Ho	L	C	H	A	F	M	B	S			
	(in.)	(mm)												
UCHA203 203-11	11/16	17	88.5	57	0	60	38	19	G3/4	27.4	11.5	UC 203 203-11	HA203	0.6
UCHA204-12 204	3/4	20	96	64	0	64	40	19	G3/4	31	12.7	UC 204-12 204	HA204	0.7
UCHA205-14 205-15 205 205-16	7/8 15/16 1	25	103	78	0	64	40	19	G3/4	34.1	14.3	UC 205-14 205-15 205 205-16	HA205	0.88
UCHA206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	103	78	0	64	40	19	G3/4	38.1	15.9	UC 206-18 206 206-19 206-20	HA206	1.0
UCHA207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	116	92	0	70	40	19	G3/4	42.9	17.5	UC 207-20 207-21 207-22 207 207-23	HA207	1.2
UCHA208-24 208-25 208	1-1/2 1-9/16	40	121	96	2	73	40	19	G3/4	49.2	19	UC 208-24 208-25 208	HA208	1.3
UCHA209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	136	108	5	82	48	21	G1	49.2	19	UC 209-26 209-27 209-28 209	HA209	1.8
UCHA210-30 210-31 210 210-32	1-7/8 1-15/16 2	50	140.5	115	5	83	48	21	G1	51.6	19	UC 210-30 210-31 210 210-32	HA210	2.1
UCHA211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	150	126	7	87	60	24	G1-1/4	55.6	22.2	UC 211-32 211-34 211 211-35	HA211	2.8
UCHA212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	173	142	9	102	60	28	G1-1/4	65.1	25.4	UC 212-36 212 212-38 212-39	HA212	3.9
UCHA213-40 213	2-1/2	65	200	166	9.5	117	70	32	G1-1/2	65.1	25.4	UC 213-40 213	HA213	5.9
UCHA214-44 214	2-3/4	70	200	166	9.5	117	70	32	G1-1/2	74.6	30.2	UC 214-44 214	HA214	5.9
UCHA215-47 215 215-48	2-15/16 2	75	200	166	9.5	117	70	32	G1-1/2	77.8	33.2	UC 215-47 215 215-48	HA215	5.9

SAPF
Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions(mm)									Bearing No.	Housing No.	Mass (kg)
	d (In.)	(mm)	L	P	A ₂	t	N	S	B	Bolt Size				
SAPF 201		12										SA 201		0.29
201-8	1/2											201-8		
202		15										202		0.29
202-10	5/8		82	64	7	2	7.5	6.5	28.6	1/4	M6	202-10	PF203	
203		17										203		0.28
203-11	11/16											203-11		
SAPF 204-12	3/4	20	91	71	8	2	9	7	29.5	5/16	M8	SA 204-12	PF204	0.31
204												204		
SAPF 205-14	7/8											SA 205-14		
205-15	15/16											205-15	PF205	0.41
205		25	95	76	9	2	9	7.5	30.5	5/16	M8	205		
205-16	1											205-16		
SAPF 206-18	1-1/8											SA 206-18		
206		30										206	PF206	0.67
206-19	1-3/16		113	90	9	2.5	10.5	8	33.9	3/8	M10	206-19		
206-20	1-1/4											206-20		
SAPF 207-20	1-1/4											SA 207-20		
207-21	1-5/16											207-21	PF207	0.67
207-22	1-3/8		122	100	10	2.5	10.5	9	37.5	3/8	M10	207-22		
207		35										207		
207-23	1-7/16											207-23		

PRESSED STEEL HOUSING FLANGE UNITS(PFT TYPE)

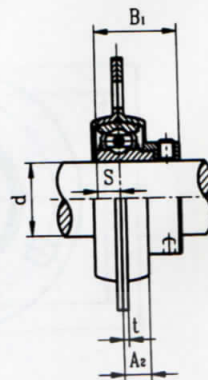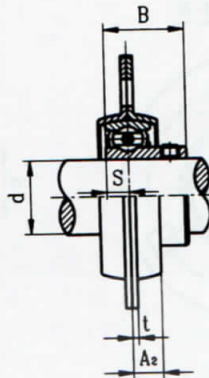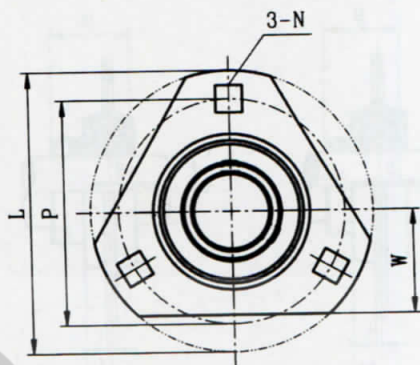

SBPFT

Set screw type




SAPFT

Eccentric locking collar type



Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d (in.)	(mm)	L	P	A ₂	t	N	W	S	B					
SBPFT 201 201-8 202 202-10 203 203-11	1/2 5/8 11/16	12 15 17	82	64	7	2	7.5	29	6	22	1/4	M6	SB 201 201-8 202 202-10 203 203-11	PFT203	0.27 0.27 0.26
SBPFT 204-12 204	3/4	20	91	71	8	2	9	33	7	25	5/16	M8	SB 204-12 204	PFT204	0.3
SBPFT 205-14 205-15 205 205-16	7/8 15/16 1	25	95	76	9	2	9	35	7.5	27	5/16	M8	SB 205-14 205-15 205 205-16	PFT205	0.38
SBPFT 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	113	90	9	2.5	10.5	38	8	29	3/8	M10	SB 206-18 206 206-19 206-20	PFT206	0.62
SBPFT 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	122	100	10	2.5	10.5	45	9	32	3/8	M10	SB 207-20 207-21 207-22 207 207-23	PFT207	0.82

Unit No.	Shaft Dia.		Dimensions(mm)								Bolt Size		Bearing No.	Housing No.	Mass (kg)
	d (in.)	(mm)	L	P	A ₂	t	N	W	S	B ₁					
SAPFT 201 201-8 202 202-10 203 203-11	1/2 5/8 11/16	12 15 17	82	64	7	2	7.5	29	6.5	28.6	1/4	M6	SA 201 201-8 202 202-10 203 203-11	PFT203	0.29 0.29 0.28
SAPFT 204-12 204	3/4	20	91	71	8	2	9	33	7	29.5	5/16	M8	SA 204-12 204	PFT204	0.31
SAPFT 205-14 205-15 205 205-16	7/8 15/16 1	25	95	76	9	2	9	35	7.5	30.5	5/16	M8	SA 205-14 205-15 205 205-16	PFT205	0.41
SAPFT 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	113	90	9	2.5	10.5	38	8	33.9	3/8	M10	SA 206-18 206 206-19 206-20	PFT206	0.67
SAPFT 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	122	100	10	2.5	10.5	45	9	37.5	3/8	M10	SA 207-20 207-21 207-22 207 207-23	PFT207	0.67

SN-SSN 500 SERIES

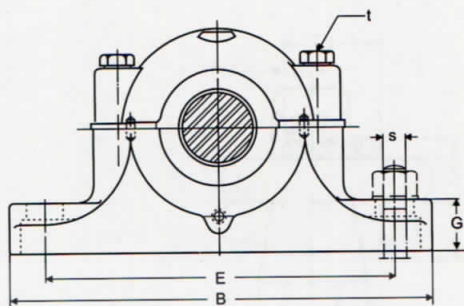

Housing No.	Dimensions (mm)															d2H12 Metric
	Shaft Dia. d1		D	B	b	G	F	A	L	H	E	E1	L1	X	Z	
	mm.	in.	H8				H13	h13								
SN 505	20	3/4	52	165	46	22	25	40	67	75	130	25		22	-	21.5
SN 506	25	1	62	185	52	22	30	50	77	90	150	25		22	-	26.5
SN 507	30	1 1/8	72	185	52	22	33	50	82	95	150	25	-	24		31.5
SN 508	35	1 1/4	80	205	60	25	33	60	85	110	170	30		26		36.5
SN 509	40	1 1/2	85	205	60	25	31	60	85	112	170	30		28		41.5
SN 510	45	1 3/4	90	205	60	25	33	60	90	115	170	30		28		46.5
SN 511	50	2	100	255	70	28	33	70	95	130	210	35	160	30	54	51.5
SN 512	55	2 1/8	110	255	70	30	38	70	105	135	210	35	172	32	62	56.5
SN 513	60	2 1/4	120	275	80	30	43	80	110	150	230	40	172	36	62	62
SN 515	65	2 1/2	130	280	80	30	41	80	115	155	230	40	182	38	68	67
SN 516	70	2 3/4	140	315	90	32	43	95	120	175	260	50	184	40	68	72
SN 517	75	3	150	320	90	32	46	95	125	185	260	50	184	42	70	77
SN 518	80	3 1/4	160	345	100	35	62.4	100	145	195	290	50	204	50	81	82
SN 519	85	-	170	345	100	35	53	112	140	210	290	50	-	-	-	87
SN 520	90	3 1/2	180	380	110	40	70.3	112	160	218	320	60	224	54	90	92
SN 522	100	4	200	410	120	45	80	125	175	240	350	70	232	60	92	102
SN 524	110	4 1/4	215	410	120	45	86	140	185	270	350	70	248	64	95	113
SN 526	115	4 1/2	230	445	130	50	90	150	190	290	380	70	268	64	100	118
SN 528	125	5	250	500	150	50	98	150	205	305	420	80	286	70	108	128
SN 530	135	5 1/4	270	530	160	60	106	160	220	325	450	90	304	76	113	138
SN 532	140	5 1/2	290	550	160	60	114	170	235	345	470	90	320	80	122	143

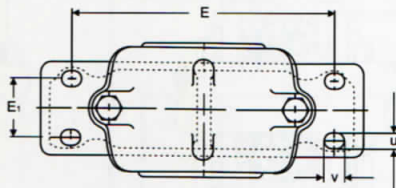

Notes:




Foot of standard housing SSN type is solid without mounting holes or can be precast as 2-bolt (with prefix T) or 4-bolt mounting holes (with prefix F).

Taconite seal will be supplied as optional for perfect arrangement in severe operating conditions to prevent contamination from fine abrasive dust.



ZF rubber seals can be supplied upon request.

d3 H12	t	f1 H13	f2	u	v	S		Wt.(kg)		Bearing No.		Adapter Sleeve		Locating Ring	
						2 bolt	4 bolt	SN5	SSN5	Self-Alig Ball	Spherical Roller	Metric	Inch	No.	Qty
31	M8	3	4.2	15	20	M12	M8	1.5	2.3	1205K 2205K	- 22205K	H205 H305	HE205 HE305	52x5 52x7	2 1
38	M8	4	5.4	15	20	M12	M10	1.74	2.8	1206K 2206K	- 22206K	H206 H306	HE206 HE306	62x7 62x10	2 1
43	M10	4	5.4	15	20	M12	M10	1.9	3.2	1207K 2207K	- 22207K	H207 H307	HE207 HE307	72x8 72x10	2 1
48	M10	4	5.4	15	20	M12	M10	2.63	3.2	1208K 2208K	- 22208K	H208 H308	HE208 HE308	80x7.5 80x10	2 1
53	M10	4	5.4	15	20	M12	M10	2.64	3.7	1209K 2209K	- 22209K	H209 H309	HE209 HE309	85x6 85x8	2 1
58	M10	4	5.4	15	20	M12	M10	2.8	3.8	1210K 2210K	- 22210K	H210 H310	HE210 HE310	90x6.5 90x10	2 1
67	M12	5	6.9	18	23	M16	M12	4.32	6.2	1211K 2211K	- 22211K	H211 H311	HE211 HE311	100x6 100x8	2 1
72	M12	5	6.9	18	23	M16	M12	4.99	6.5	1212K 2212K	- 22212K	H212 H312	HE212 HE312	110x8 110x10	2 1
77	M12	5	6.8	18	23	M16	M12	5.64	8.3	1213K 2213K	- 22213K	H213 H313	HE213 HE313	120x10 120x12	2 1
82	M12	5	6.8	18	23	M16	M12	6.19	9.0	1215K 2215K	- 22215K	H215 H315	HE215 HE315	130x8 130x10	2 1
89	M16	6	8.1	22	27	M20	M12	8.17	12.1	1216K 2216K	- 22216K	H216 H316	HE216 HE316	140x8.5 140x10	2 1
94	M16	6	8.1	22	27	M20	M12	9.37	12.2	1217K 2217K	- 22217K	H217 H317	HE217 HE317	150x9 150x10	2 1
99	M16	6	8.1	22	27	M20	M16	11.5	15.2	1218K 2218K	- 22218K	H218 H318	HE218 HE318	160x16.2 160x11.2	2 2
104	M16	6	8.1	22	28	M20	M16	13.5	17.7	1219K 2219K	- 22219K	H219 H319	HE219 HE319	170x10.5 170x10	2 1
111	M20	7	9.3	26	32	M24	M16	16.3	20.5	2220K 23220K	22220K 23220K	H320 H2320	HE320 HE2320	180x12.1 180x10	2 1
125	M20	8	10.8	26	32	M24	M16	25.1	29.2	2222K 23222K	22222K 23222K	H322 H2322	HE322 HE2322	200x13.5 200x10	2 1
135	M20	8	10.7	26	34	M24	M16	27.2	33	- 23224K	22224K 23224K	H3124 H2324	HE3124 HE2324	215x14 215x10	2 1
140	M24	8	10.7	28	35	M24	M20	35.2	40.9	- 23226K	22226K 23226K	H3126 H2326	HE3126 HE2326	230x13 230x10	2 1
154	M24	9	12.2	34	44	M30	M24	43.7	48.6	- 23228K	22228K 23228K	H3128 H2328	HE3128 HE2328	250x15 250x10	2 1
164	M24	9	12.2	34	42	M30	M24	45.3	56.2	- 23230K	22230K 23230K	H3130 H2330	HE3130 HE2330	270x16.5 270x10	2 1
173	M24	10	13.7	32	44	M30	M24	50.75	68.5	- 23232K	22232K 23232K	H3132 H2332	HE3132 HE2332	290x17 290x10	2 1

SN-SSN 600 SERIES

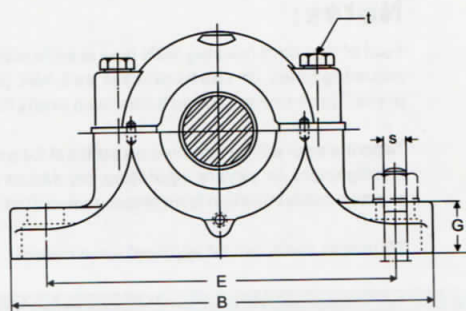

Housing No.	Dimensions (mm)															
	Shaft Dia. d1		D H8	B	b	G	F H13	A h13	L	H	E	E1	L1	X	d2H12 Metric	d3 H12
	mm.	in.														
SN 605	20	3/4	62	185	52	22	34	50	80	90	150	25	-	27	21.5	31
SN 606	25	1	72	185	52	22	37	50	82	95	150	25	-	27	26.5	38
SN 607	30	1 1/8	80	205	60	25	41	60	90	110	170	30	-	32	31.5	43
SN 608	35	1 1/4	90	205	60	25	43	60	95	115	170	30	-	34	36.5	48
SN SSN 609	40	1 1/2	100	255	70	28	46	70	105	130	210	35	-	36	41.5	53
SN SSN 610	45	1 3/4	110	255	70	30	50	70	115	135	210	35	-	39	46.5	58
SN SSN 611	50	2	120	275	80	30	53	80	120	150	230	40	185	40	51.5	67
SN SSN 612	55	2 1/8	130	280	80	30	56	80	125	155	230	40	185	44	56.5	72
SN SSN 613	60	2 1/4	140	315	90	32	58	95	130	175	260	50	200	46	62	77
SN SSN 615	65	2 1/2	160	345	100	35	65	100	140	195	290	50	210	51	67	82
SN SSN 616	70	2 3/4	170	345	100	35	68	112	145	212	290	50	210	52	72	89
SN SSN 617	75	3	180	380	110	40	70	112	155	218	320	60	220	56	77	94
SN SSN 618	80	3 1/4	190	400	110	33	74	112	160	230	320	60	225	58	82	99
SN SSN 619	85	-	200	420	120	36	77	125	170	245	350	70	235	60	87	104
SN SSN 620	90	3 1/2	215	420	120	38	83	140	175	280	350	70	240	64	92	111
SN SSN 622	100	4	240	460	130	40	90	150	190	300	390	70	258	69	102	125
SN SSN 624	110	4 1/4	260	540	160	50	96	160	205	325	450	90	280	73	113	135
SN SSN 626	115	4 1/2	280	560	160	50	103	170	215	350	470	90	300	77	118	140
SN SSN 628	125	5	300	630	170	55	112	180	235	375	520	90	320	83	128	154
SN SSN 630	135	5 1/4	320	680	180	55	118	190	245	395	560	90	340	88	138	164
SN SSN 632	140	5 1/2	340	710	190	60	124	200	255	415	580	100	350	93	143	173

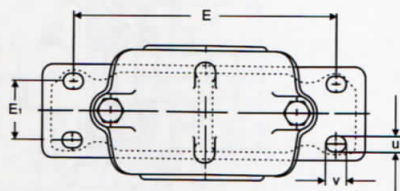

Notes:

Foot of standard housing SSN type is solid without mounting holes or can be precast as 2-bolt (with prefix T) or 4-bolt mounting holes (with prefix F).

Taconite seal will be supplied as optional for perfect arrangement in severe operating conditions to prevent contamination from fine abrasive dust.

ZF rubber seals can be supplied upon request.

t	f1 H13	f2	u	v	S		Wt.(kg)		Bearing No.		Adapter Sleeve		Locating Ring	
					2 bolt	4 bolt	SN6	SSN6	Self-Align Ball	Spherical Roller	Metric	In.	No.	Qty
M8	3	4.2	16	20	M12	M10	2.11	-	1305K 2305K	-	H305 H2305	HE305 HE2305	62x8.5 62x10	2 1
M10	4	5.4	16	20	M12	M10	2.09	-	1306K 2306K	-	H306 H2306	HE306 HE2306	72x9 72x10	2 1
M10	4	5.4	16	20	M12	M10	3.4	4.1	1307K 2307K	-	H307 H2307	HE307 HE2307	80x10 80x10	2 1
M10	4	5.4	15	24	M12	M10	3.6	4.7	1308K 2308K	21308K 22308K	H308 H2308	HE308 HE2308	90x10 90x10	2 1
M12	4	5.4	19	25	M16	M12	5.3	6.8	1309K 2309K	21309K 22309K	H309 H2309	HE309 HE2309	100x10.5 100x10	2 1
M12	4	5.4	18	23	M16	M12	5.5	6.8	1310K 2310K	21310K 22310K	H310 H2310	HE310 HE2310	110x11.5 110x10	2 1
M12	5	6.9	20	28	M16	M12	6.9	9.0	1311K 2311K	21311K 22311K	H311 H2311	HE311 HE2311	120x12 120x10	2 1
M12	5	6.9	20	28	M16	M12	8.8	10.5	1312K 2312K	21312K 22312K	H312 H2312	HE312 HE2312	130x12.5 130x10	2 1
M16	5	6.8	22	30	M20	M12	9.8	12.4	1313K 2313K	21313K 22313K	H313 H2313	HE313 HE2313	140x12.5 140x10	2 1
M16	5	6.8	23	28	M20	M16	13.0	16.4	1315K 2315K	21315K H2315	H315 HE2315	HE315 HE2315	160x14 160x10	2 1
M16	6	8.1	23	30	M20	M16	15.5	19.7	1316K 2316K	21316K 22316K	H316 H2316	HE316 HE2316	170x14.5 170x10	2 1
M20	6	8.1	26	35	M24	M16	16.3	20.7	1317K 2317K	21317K 22317K	H317 H2317	HE317 HE2317	180x14.5 180x10	2 1
M20	6	8.1	27	38	M24	M16	20.0	24	1318K 2318K	- 22318K	H318 H2318	HE318 HE2318	190x15.5 190x10	2 1
M20	6	8.1	28	36	M24	M16	28.0	29.7	1319K 2319K	- 22319K	H319 H2319	HE319 HE2319	200x16 200x10	2 1
M20	7	9.3	27	33	M24	M16	30.5	37.1	1320K 2320K	- 22320K	H320 H2320	HE320 HE2320	215x18 215x10	2 1
M20	8	10.0	28	32	M24	M16	42	49.2	1322K 2322K	- 22322K	H322 H2322	HE322 HE2322	240x20 240x10	2 1
M24	8	10.7	34	42	M30	M20	59	72	-	22324K	H2324	HE2324	260x10	1
M24	8	10.7	34	42	M30	M20	61.5	80.9	-	22326K	H2326	HE2326	280x10	1
M30	9	12.2	34	46	M30	M20	88	105	-	22328K	H2328	HE2328	300x10	1
M30	9	12.2	38	44	M30	M20	89	115	-	22330K	H2330	HE2330	320x10	1
M30	10	13.7	40	52	M36	M24	127	145	-	22332K	H2332	HE2332	340x10	1